



BELL

Bell Weatherproof Boxes, Covers, And Lighting



BELL

STANDARDS, 1999 NATIONAL ELECTRICAL CODE®

Standards

- Bell® Federal Manufacturer's Number 08556
- Bell® UPC Vendor Number 050169

Where applicable, Bell® products are engineered in accordance with the standards established by Underwriters Laboratories, C/UL, and the Canadian Standards Association. Dimensional data listed in this catalog is intended for general reference with broad tolerance limits.

1999 NEC

When specifying Bell® Weatherproof boxes and covers, consult the requirements of the National Electrical Code, Article 370-16 and 410-57. Article 370-16 details the NEC requirements for the maximum number of conductors allowed for a Bell® Weatherproof installation. Article 410-57 provides details on the NEC requirements for receptacles being used in wet locations.

For your convenience, we have reprinted the pertinent NEC articles. In all cases, consult your local electrical code and inspector interpretation.

Wiring Capacity: Bell® Weatherproof Boxes and Extensions**Maximum Number of Conductors or Minimum Size Box (Article 370-16)**

The purpose of Article 370-16 is to determine the maximum conductor count or the minimum box size required for the job. It also can be used to figure how many other conductors may be added without exceeding the Code-prescribed limit. Most applications have determined the number of conductors. The rules of Article 370-16 are used to determine the Code-recognized limit, or smallest box that may be installed.

Selection of any Bell® Weatherproof box or extension for use in any electrical circuit work must take into consideration the maximum number of wires permitted in the box. Safe electrical practice demands that wires not be jammed into boxes because of the possibility of nicks, abrasions, or other damage to the insulating material, creating the potential for ground faults or short circuits.

Article 370 – Boxes and Fittings

370-16. Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies. Boxes and conduit bodies shall be of sufficient size to provide free space for all enclosed conductors. In no case shall the volume of the box, as calculated in (a), be less than the fill calculation as calculated in (b). The minimum volume for conduit bodies shall be as calculated in (c).

The provisions of this section shall not apply to terminal housings supplied with motors. (See Section 430-12.)

Boxes and conduit bodies enclosing conductors, size No. 4 or larger, shall also comply with the provisions of Section 370-28.

(a) Box Volume Calculations. The volume of a wiring enclosure (box) shall be the total volume of the assembled sections, and, where used, the space provided by plaster rings, domed covers, extension rings, etc., that are marked with their volume in cubic inches or are made from boxes the dimensions of which are listed in Table 370-16(a).

(1) Standard Boxes. The volume of standard boxes that are not marked with a cubic inch capacity shall be as given in Table 370-16(a).

(2) Other Boxes. Boxes 100 cubic inches (1,640 cu. in.) or less, other than those described in Table 370-16(a), and nonmetallic boxes shall be durably and legibly marked by the manufacturer with their cubic inch capacity. Boxes described in Table 370-16(a) that have a larger cubic inch capacity than is designated in the table shall be permitted to have their cubic inch capacity marked as required by this section.

(b) Box Fill Calculations. The volumes in paragraphs (1) through (5) below, as applicable, shall be added together. No allowance shall be required for small fittings such as locknuts and bushings.

(1) Conductor Fill. Each conductor that originates outside the box and terminates or is spliced within the box shall be counted once, and each conductor that passes through the box without splice or termination shall be counted once. The conductor fill, in cubic inches, shall be computed using Table 370-16(b). A conductor, no part of which leaves the box, shall not be counted.

Exception: An equipment grounding conductor or conductors or not over four fixtures wires smaller than No. 14, or both, shall be permitted to be omitted from the calculations where they enter a box from a domed fixture or similar canopy and terminate within that box.

(2) Clamp Fill. Where one or more internal cable clamps, whether factory or field supplied, are present in the box, a single volume allowance in accordance with Table 370-16(b) shall be made based on the largest conductor present in the box. No allowance shall be required for a cable connector with this clamping mechanism outside the box.

STANDARDS, 1999 NATIONAL ELECTRICAL CODE®

(3) Support Fittings Fill. Where one or more fixture studs or hickies are present in the box, a single volume allowance in accordance with Table 370-16(b) shall be made for each type of fitting based on the largest conductor present in the box.

(4) Device or Equipment Fill. For each yoke or strap containing one or more devices or equipment, a double volume allowance in accordance with Table 370-16(b) shall be made for each yoke or strap based on the largest conductor connected to a device(s) or equipment supported by that yoke or strap.

(5) Equipment Grounding Conductor Fill. Where one or more equipment grounding conductors or equipment bonding jumpers enters a box, a single volume allowance in accordance with Table 370-16(b) shall be made based on the largest equipment grounding conductors, as permitted by Section 250-146(d), is present in the box, and additional volume allowance shall be made based on the largest equipment grounding conductor in the additional set.

Article 410-57(b) Wet Locations

(b) Wet Locations. A receptacle installed in a wet location where the product intended to be plugged into it is not attended while in use (e.g., sprinkler system controllers, landscape lighting, holiday lights, etc.) shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(2) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools, etc.) shall have an enclosure that is weatherproof when the attachment plug cap is removed.

Reprinted with permission from the NFPA 70-1999. *National Electrical Code®* Copyright© 1998. National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the NFPA on the reference subject which is represented only by the standard in its entirety. *National Electrical Code®* and *NEC®* are registered trademarks of the National Fire Protection Association, Quincy, MA.

BELL® PRODUCTS: GENERAL FEATURES AND BENEFITS

Bell® Weatherproof products all offer these features and benefits:

- Rugged seamless die cast construction that will not allow entry of moisture
- Reinforced connector outlets to provide a secure mechanical installation
- State-of-the-art powder coat paint for maximum weatherability and scratch resistance
- Multi-lingual instructions provided with every product
- Installation hardware and ground screws included where applicable
- Shrink-wrap packaging that keeps all components together
- UPC-A barcoding to help lower transaction costs

Refer to the following pages for more specific information about Bell® products.



STANDARDS, 1999 NATIONAL ELECTRICAL CODE®

		BOX FILL TABLE								
DEDUCTIONS		6	7	8	9	10	11	12	13	14
Volume Required per Conductor Size per Deductions	#18 (1.50)	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00
	#16 (1.75)	10.50	12.25	14.00	15.75	17.50	19.25	21.00	22.75	24.50
	#14 (2.00)	12.00	14.00	16.00	18.00	20.00	22.00	24.00	26.00	28.00
	#12 (2.25)	13.50	15.75	18.00	20.25	22.50	24.75	27.00	29.25	31.50
	#10 (2.50)	15.00	17.50	20.00	22.50	25.00	27.50	30.00	32.50	35.00
	#8 (3.00)	18.00	21.00	24.00	27.00	30.00	33.00	36.00	39.00	42.00
	#6 (5.00)	30.00	35.00	40.00	45.00	50.00	55.00	60.00	65.00	70.00

Calculate The Minimum Size Box

Part (1) of Section 370-16(a) describes in detail the method of counting wires, as well as clamps, fittings, or devices (i.e., switches, receptacles, combination devices) — by establishing an equivalent conductor-value for each. These values are added together to get a total number of conductors. The minimum size box is the smallest one in the Box Fill Table (shown) that can accommodate that number of conductors.

Points to Remember:

1. No matter how many ground wires come into a box, they only count as one conductor within the box.
2. Any wire running unbroken through the box counts as one wire.
3. Each wire coming into a splice device (crimp or twist-on type) is counted as one wire.
4. Each wire coming into the box and connecting to a device counts as one wire of that size.
5. Where devices are mounted in the box, the total conductor count must be increased by two for each mounting strap.

Example — Bell® Weatherproof

Supply power to a single switch with #14 conductors. Metal conduit will be used as the wire way. You must provide space for four conductors and one switch, totaling 6. Read across the line "Deductions" in the **Box Fill Table** to column 6, then read down to the minimum cubic inches required for #14 conductor. This example requires a minimum of 12.0 cubic inches.

**SINGLE-GANG BOXES
DIE CAST ALUMINUM**



Applications

- For use in branch circuit wiring in wet, damp, or dry locations
- May be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's



Product Features

- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package


Compliances

- - Standard 514A
- - C22.2 No. 18
- NEMA 3R Rated


SINGLE-GANG BOXES: GENERAL DIMENSIONS

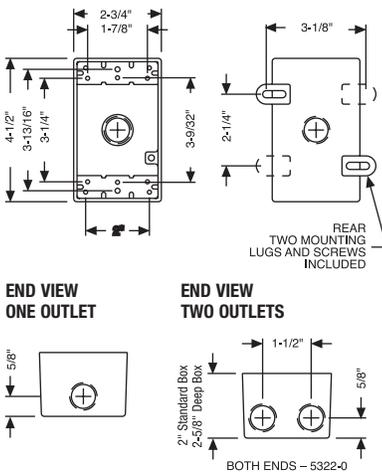


**5320-0 TO 5320-7
5324-0 TO 5324-5**




**5321-0 TO
5321-7, 5330-0**



5322-0, 5331-0



5323-0, 5332-0



5385-0 TO 5387-0

ORDERING INFORMATION - DIMENSIONS

2" DEEP, WITH LUGS - THREE THREADED OUTLETS - 4-1/2" x 2-3/4"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5320-0	17.5	Gray	3-1/2"	Shrink	20	■■■■■
5320-1	17.5	White	3-1/2"	Shrink	20	■■■■■
5320-2	17.5	Bronze	3-1/2"	Shrink	20	■■■■■
5320-5	17.5	Gray	3-1/2"	Carded	6	■■■■■
5320-6	17.5	White	3-1/2"	Carded	6	■■■■■
5320-7	17.5	Bronze	3-1/2"	Carded	6	■■■■■
5324-0	17.0	Gray	3-3/4"	Shrink	20	■■■■■
5324-5	17.0	Gray	3-3/4"	Carded	6	■■■■■

2" DEEP, WITH LUGS - FOUR THREADED OUTLETS - 4-1/2" x 2-3/4"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5321-0	17.0	Gray	4-1/2"	Shrink	20	■■■■■
5321-1	17.0	White	4-1/2"	Shrink	20	■■■■■
5321-2	17.0	Bronze	4-1/2"	Shrink	20	■■■■■
5321-5	17.0	Gray	4-1/2"	Carded	6	■■■■■
5321-6	17.0	White	4-1/2"	Carded	6	■■■■■
5321-7	17.0	Bronze	4-1/2"	Carded	6	■■■■■
5330-0	16.5	Gray	4-3/4"	Shrink	20	■■■■■

2" DEEP, WITH LUGS - FIVE THREADED OUTLETS - 4-1/2" x 2-3/4"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5322-0	16.5	Gray	5-1/2"	Shrink	20	■■■■■
5331-0	16.0	Gray	5-3/4"	Shrink	20	■■■■■
5323-0	17.0	Gray	5-1/2"	Shrink	20	■■■■■
5332-0	16.5	Gray	5-3/4"	Shrink	20	■■■■■

2-5/8" DEEP, WITH LUGS - THREE THREADED OUTLETS - 4-1/2" x 2-3/4"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5385-0	21.3	Gray	3-1/2"	Shrink	15	■■■■■
5386-0	21.3	Gray	3-3/4"	Shrink	15	■■■■■
5387-0	21.3	Gray	3-1"	Shrink	15	■■■■■



WEATHERPROOF BOXES,
COVERS AND LIGHTING

Applications


- Used to provide additional capacity needed for NEC box fill requirements
- Adapters allow installer to add "take-offs" to new boxes/devices

Product Features


- Installation hardware, gasket, and ground screw provided
- Closure plugs provided for two- and six-outlet styles

Compliances


- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

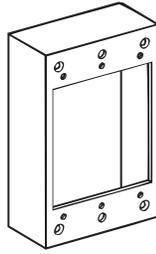

5406-0

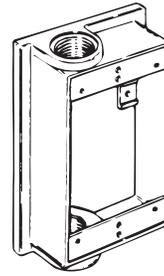


5399-0, 5403-0

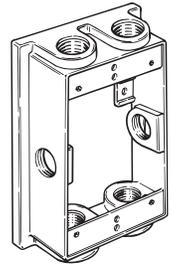


5400-0 TO 5400-5
5405-0

EXTENSIONS CAT. NO. 5406-0

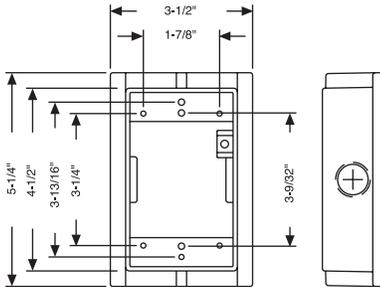

CAT. NOS. 5399-0, 5403-0

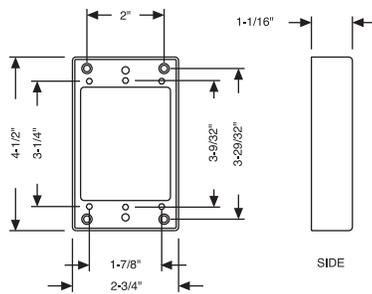

ORDERING INFORMATION - DIMENSIONS

SINGLE-GANG EXTENSION - 4-1/2" x 2-3/4" x 1" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5406-0	10.1	Gray	—	Shrink	25	

No ground screw provided

SINGLE-GANG - EXTENSION ADAPTERS - 5-1/4" x 3-1/2" x 1-1/2" DEEP - TWO THREADED OUTLETS						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5399-0	13.3	Gray	2-1/2"	Shrink	20	
5403-0	13.3	Gray	2-3/4"	Shrink	20	



Includes one closure plug

SINGLE-GANG - EXTENSION ADAPTERS - 5-1/4" x 3-1/2" x 1-1/2" DEEP - SIX THREADED OUTLETS						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5400-0	13.3	Gray	6-1/2"	Shrink	20	
5400-5*	13.3	Gray	6-1/2"	Carded	6	
5405-0	13.3	Gray	6-3/4"	Shrink	20	

Includes three closure plugs

*Includes five closure plugs

5400-0 SERIES

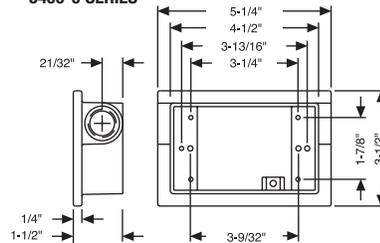

**SINGLE-GANG EXTENSION ADAPTERS
DIE CAST ALUMINUM**



Applications

- Used to provide additional capacity needed for NEC box fill requirements
- Allows installer to add “take-offs” to new boxes/devices


Product Features

- Unique swing-arm design speeds installation by allowing the installer better visibility when lining up and threading fasteners
- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Installation hardware, ground screw and gasket provided
- Multi-lingual instructions in each package



Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated


**SWING ARM EXTENSION ADAPTERS
CAT. NOS. 5412-0 TO 5415-0**

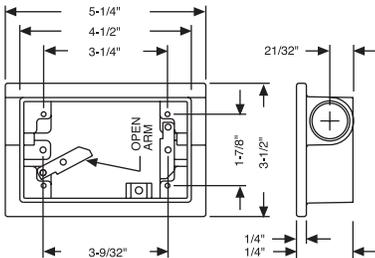

END VIEW – SIX OUTLET STYLES

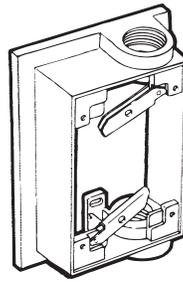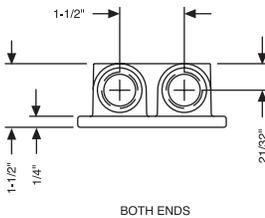

5412-0, 5413-0

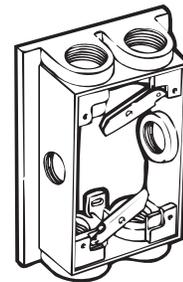

5414-0, 5415-0

ORDERING INFORMATION - DIMENSIONS

SWING-ARM – EXTENSION ADAPTERS – 3-1/2" x 5-1/4" x 1-1/2" DEEP – TWO THREADED OUTLETS						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5412-0	13.8	Gray	2-1/2"	Shrink	10	
5413-0	13.8	Gray	2-3/4"	Shrink	10	

Includes one closure plug

SWING-ARM – EXTENSION ADAPTERS – 3-1/2" x 5-1/4" x 1-1/2" DEEP – SIX THREADED OUTLETS						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5414-0	13.8	Gray	6-1/2"	Shrink	10	
5415-0	13.8	Gray	6-3/4"	Shrink	10	

Includes three closure plugs





Applications

- For use in branch circuit wiring in wet, damp, or dry locations
- Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's


Product Features

- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed
- Multi-lingual instructions in each package


Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated



TWO-GANG BOXES GENERAL DIMENSIONS

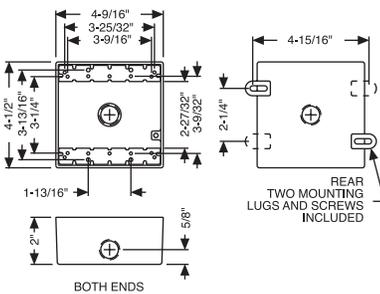


END VIEW FOR STYLES WITH TWO OUTLETS ON ONE END




SIDE VIEW 5334-0, 5342-0




5333-0, 5341-0



5337-0 TO 5337-5,
5345-0



5335-0, 5343-0



5334-0, 5342-0

ORDERING INFORMATION - DIMENSIONS

2" DEEP, WITH LUGS - THREE THREADED OUTLETS - 4-1/2" X 4-9/16"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5333-0	30.5	Gray	3-1/2"	Shrink	12	
5341-0	30.5	Gray	3-3/4"	Shrink	12	

2" DEEP, WITH LUGS - FOUR THREADED OUTLETS - 4-1/2" x 4-9/16"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5335-0	30.0	Gray	4-1/2"	Shrink	12	
5343-0	30.0	Gray	4-3/4"	Shrink	12	

2" DEEP, WITH LUGS - FIVE THREADED OUTLETS - 4-1/2" x 4-9/16"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5337-0	29.0	Gray	5-1/2"	Shrink	12	
5337-1	29.0	White	5-1/2"	Shrink	12	
5337-2	29.0	Bronze	5-1/2"	Shrink	12	
5337-5	29.0	Gray	5-1/2"	Carded	4	
5345-0	29.0	Gray	5-3/4"	Shrink	12	
5334-0	30.5	Gray	5-1/2"	Shrink	12	
5342-0	30.5	Gray	5-3/4"	Shrink	12	

**TWO-GANG BOXES
DIE CAST ALUMINUM**



Applications


- For use in branch circuit wiring in wet, damp, or dry locations
- Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's

Product Features


- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable plugs provided
- Two closure plugs included
- Ground screw installed in boxes
- Multi-lingual instructions in each package

Compliances


- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

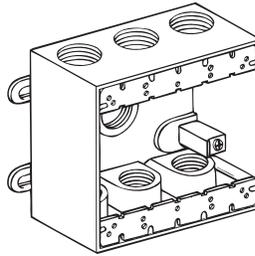

5340-0, 5348-0



5338-0, 5346-0

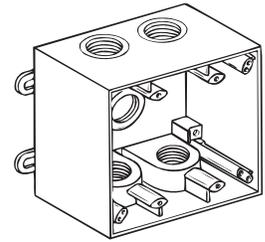

5388-0, 5389-0

ORDERING INFORMATION - DIMENSIONS


2" DEEP, WITH LUGS - SEVEN THREADED OUTLETS - 4-1/2" x 4-9/16"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5340-0	28.0	Gray	7-1/2"	Shrink	12	
5348-0	28.0	Gray	7-3/4"	Shrink	12	
5338-0	29.0	Gray	7-1/2"	Shrink	12	
5346-0	29.0	Gray	7-3/4"	Shrink	12	

Includes two closure plugs


2-5/8" DEEP, WITH LUGS - FIVE THREADED OUTLETS - 4-1/2" x 4-9/16"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5388-0	36.8	Gray	5-3/4"	Shrink	9	
5389-0	36.5	Gray	5-1"	Shrink	9	

Includes two closure plugs


**TWO-GANG BOXES WITH 7 OUTLETS
CAT. NOS. 5340-0, 5348-0**

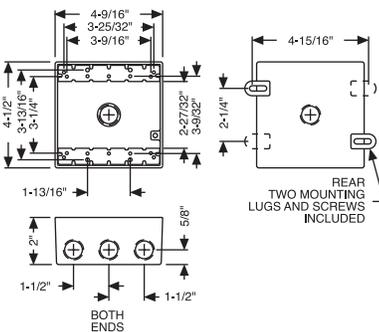

CAT. NOS. 5338-0, 5346-0

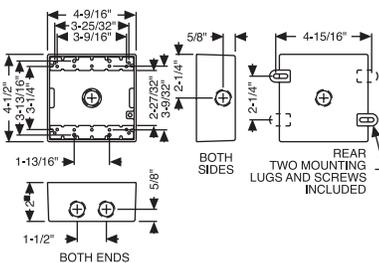

**TWO-GANG BOXES WITH 5 OUTLETS
CAT. NOS. 5388-0, 5389-0**

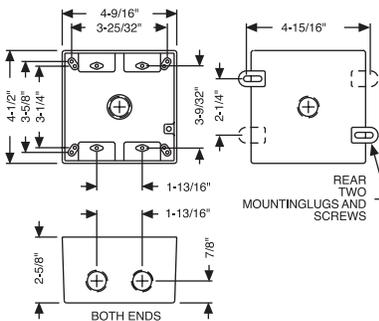



Two-Gang Extension Application

- Used to provide additional capacity needed for NEC box fill requirements

Two-Gang Extension Product Features

- Rugged seamless construction
- State-of-the-art powder coat finish
- Installation hardware and gasket provided
- Multi-lingual instructions in each package

Two-Gang Extension Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

Three-Gang Box Applications


- For use in branch circuit wiring in wet, damp, or dry locations
- Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's

Three-Gang Box Product Features


- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed in boxes
- Multi-lingual instructions in each package

Three-Gang Box Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

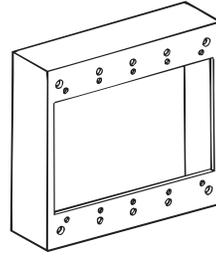

5407-0

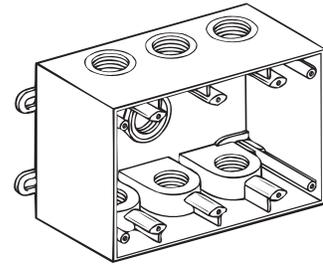

5390-0


ORDERING INFORMATION - DIMENSIONS

TWO-GANG EXTENSION - 4-1/2" x 4-9/16" x 1" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5407-0	16.3	Gray	—	Shrink	10	


THREE-GANG BOX - 2-5/8" DEEP, WITH LUGS - SEVEN THREADED OUTLETS - 4-1/2" x 6-3/8"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5390-0	56.0	Gray	7-3/4"	Boxed	1	

Includes four closure plugs

TWO-GANG EXTENSION

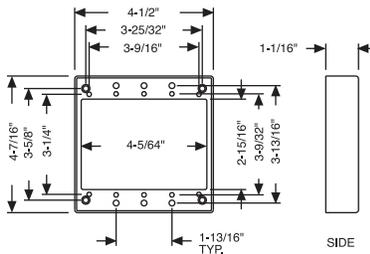

THREE-GANG BOX

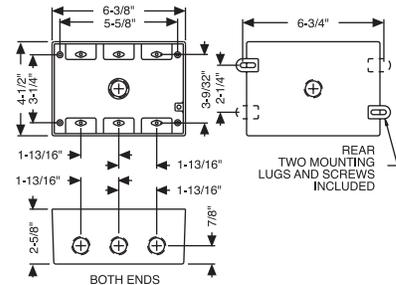

4" Round Splice Boxes

Applications

- For use in branch circuit wiring in wet, damp, or dry locations
- Designed for use as a weather-proof junction box, and may be used with Bell® round cluster covers and round lampholder combinations

4" Round Splice Boxes


Product Features

- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Cast-in mounting lugs provide fast, secure installation
- Includes four closure plugs, installed ground screw, and multi-lingual instructions


4" Round Splice Boxes

Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

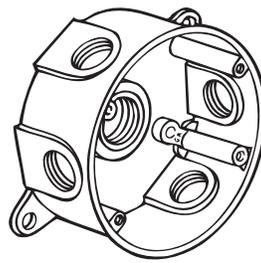

5361-0 TO 5361-7, 5372-0

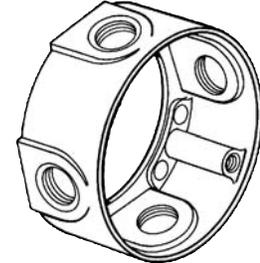

5363-0

ORDERING INFORMATION - DIMENSIONS

4" ROUND SPLICE BOX – FIVE THREADED OUTLETS – 1-1/2" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5361-0	16.1	Gray	5-1/2"	Shrink	16	
5361-1	16.1	White	5-1/2"	Shrink	16	
5361-2	16.1	Bronze	5-1/2"	Shrink	16	
5361-5	16.1	Gray	5-1/2"	Carded	6	
5361-6	16.1	White	5-1/2"	Carded	6	
5361-7	16.1	Bronze	5-1/2"	Carded	6	
5372-0	16.1	Gray	5-3/4"	Shrink	16	

4" ROUND EXTENSION ADAPTER – FOUR THREADED OUTLETS – 1-1/2" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5363-0	18.3	Gray	4-1/2"	Shrink	16	

4" Round Extension Adapters

Applications

- For use with 4" round splice boxes
- Extension adapters are used to increase box capacity and allow the installer to add "take-offs" to new boxes/devices

4" Round Extension Adapters

Product Features


- Rugged die cast construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Includes installation hardware, closure plugs, gasket, and multi-lingual instructions

4" Round Extension Adapters


Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

4" ROUND SPLICE BOXES

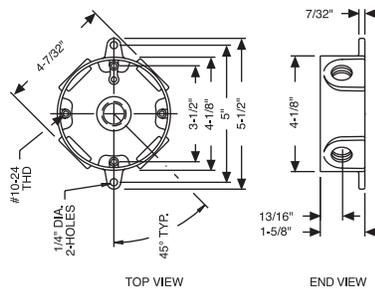

4" ROUND EXTENSION ADAPTERS

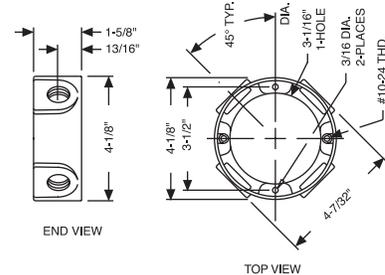



Application


- For use with 4" round splice boxes

Product Features

- Rugged aluminum construction
- State-of-the-art powder coat finish
- Includes installation hardware, gasket, and multi-lingual instructions

Compliances


- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

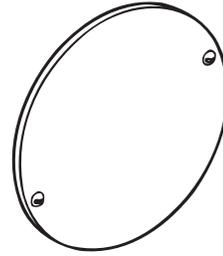

5374-0

ORDERING INFORMATION - DIMENSIONS

4" ROUND COVER

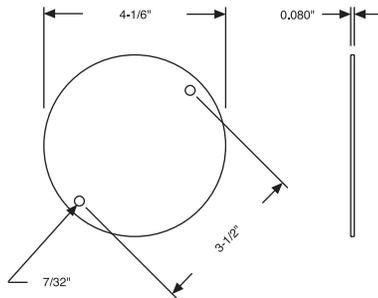


4" ROUND COVER					
CATALOG NUMBER	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
	COLOR	OUTLETS			
5374-0	Gray	Blank	Shrink	30	

Weatherproof Housing
Application

- For telephone installations at pool-side, patio, garden or garage

Weatherproof Housing
Product Features

- Kit comes complete — all you add is the telephone jack
- Rugged seamless die cast construction will not allow entry of moisture
- State-of-the-art powder coated finish provides for maximum weather-ability and scratch resistance
- Multi-lingual installation instructions included

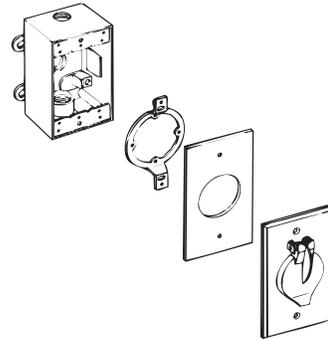

5315-0

ORDERING INFORMATION - DIMENSIONS

WEATHERPROOF HOUSING - 2" DEEP, TELEPHONE USE					
CATALOG NUMBER	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
	COLOR	OUTLETS			
5315-0	Gray	3-1/2"	Box	25	

Yoke, gasket, cord grip, and 3 grommets included



Mini-Box Application

- For use as a weatherproof junction box or housing for a receptacle wherever space is a factor

Mini-Box Product Features


- Rugged seamless construction
- State-of-the-art powder coat finish
- Includes two closure plugs and hardware

Mini Snap Cover and Receptacle Application


- For use when a convenience outlet is required in a small space

Mini Snap Cover and Receptacle Product Features

- State-of-the-art powder coat finish
- Self-closing lid assures weatherproof protection when the receptacle is not in use

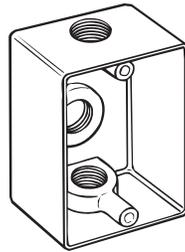

5364-0

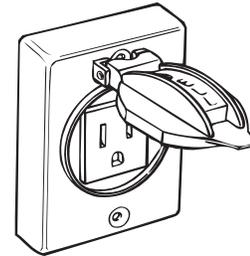


5185-0


ORDERING INFORMATION - DIMENSIONS

MINI-BOX AND COVER BOX - 3" x 2" x 2" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5364-0	6.1	Gray	Box, 3-1/2" outlets	Shrink	5	
5185-0	—	Gray	Cover & 125V 15A receptacle	Shrink	10	

MINI-BOX CAT. NO. 5364-0

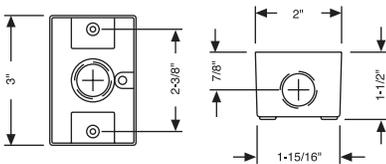

COVER CAT. NO. 5185-0

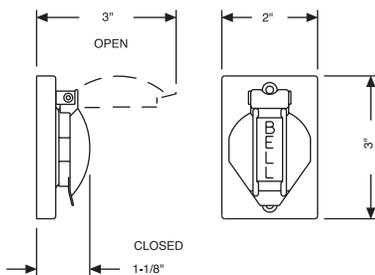

**GENERATOR HOOK-UP BOX
DIE CAST ALUMINUM**



Application


- For temporary power hook-ups to portable generators following storms, on construction sites, with RV's or anywhere portable generator power is needed

Product Features

- Extra-deep weatherproof box gives installers the room needed to wire the box efficiently
- State-of-the-art powder-coated finish provides years of protection against the elements
- Installation hardware, gasket, and ground screw is provided
- No need to search for additional components
- Male receptacle is securely mounted to the cover for added durability under extreme conditions
- Male receptacle contains individual wire pockets with clamp-type terminals and color coded terminals for easy identification
- Multi-lingual installation instructions are included

Compliances

- – Standard 514A
- – C22.2 No. 18

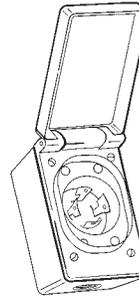

5840-5, 5835-5

ORDERING INFORMATION - DIMENSIONS

GENERATOR HOOK-UP BOX - DIE CAST ALUMINUM					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5840-5	Gray	Generator Hook-up box with 3-pole, 4 wire, 30 amp, 125V/250V NEMA L14-30 male receptacle	Box	4	
5835-5	Gray	Generator Hook-up box with 3-pole, 4 wire, 20 amp, 125V/250V NEMA L14-20 male receptacle	Box	4	



Applications


- For use whenever Weatherproof-While-In-Use protection is required for an outdoor outlet
- Use Bell® Outdoor Outlets for security lights, power tools, electric lawn mowers, outdoor flood lights, water gardening displays, holiday lighting, auto engine heaters, etc.

Product Features

- Six heavy-duty grounded outlets for safety
- High-impact polycarbonate construction — no need to worry about rust and corrosion
- Tinted lid hides dust, dirt, and scratches
- Designed for use in extreme outdoor temperatures
- Use with confidence in all climates
- Four models to choose from; two with photo controls, and two with photocell-driven timers
- Choose the right product for your needs
- All models can be mounted to a home, garage, or deck
- Vertical Outdoor Outlets available with removable ground stakes

Compliances

- – For wet locations
- NEMA 3R Rated

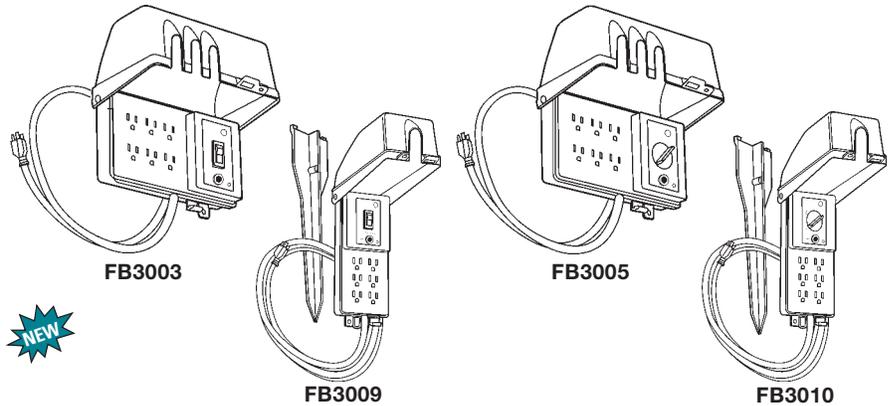

ORDERING INFORMATION - DIMENSIONS

VERTICAL DEVICE MOUNT				
CATALOG NUMBER	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
FB3003	3 position photocell (off-continuous on- dusk to dawn) 15A, 120V 1800W rating, 15 amp circuit breaker with 30" 14/3 heavy duty cord	Box	12	
FB3005	6 position timer (off-continuous on-on at dusk for 2, 4 or 6 hours-dusk to dawn) 15A, 120V 1800W rating, 15 amp circuit breaker with 30" 14/3 heavy duty cord	Box	12	
FB3009	3 position photocell (off-continuous on- dusk to dawn) 15A, 120V 1800W rating, 15 amp circuit breaker with 10' 14/3 heavy duty cord and ground stake	Box	12	
FB3010	6 position timer (off-continuous on-on at dusk for 2, 4 or 6 hours-dusk to dawn) 15A, 20V 1800W rating, 15 amp circuit breaker with 10' 14/3 heavy duty cord and ground stake	Box	12	

RAYNTITE® M.R. II SINGLE-GANG
WEATHERPROOF-WHILE-IN-USE COVERS
POLYCARBONATE



Application


- Rayntite® M.R. II covers are designed for use whenever weatherproof protection is required while an outlet is in use

Product Features

- Modularity: 9 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- High-impact polycarbonate construction: Virtually indestructible — no need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 410-57 (B) requirements — no need to worry about Code compliances

Compliances



- - Standard 514C
- - C22.2 No. 18
- NEMA 3R Rated
- Meets NEC 410-57(B) requirements

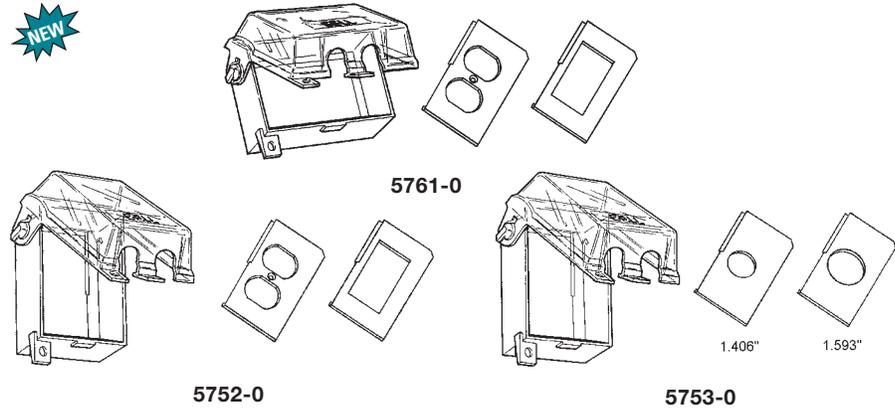



ORDERING INFORMATION - DIMENSIONS

SINGLE-GANG - STANDARD DEPTH				
CATALOG NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5761-0	(1) Duplex (1) GFCI - Horizontal mount	Shrink	10	
5752-0	(1) Duplex (1) GFCI - Vertical mount	Shrink	10	
5753-0	(1) 1.406" diameter (1) 1.593" diameter Vertical mount	Shrink	10	

CAT. NOs. 5752-0, 5753-0

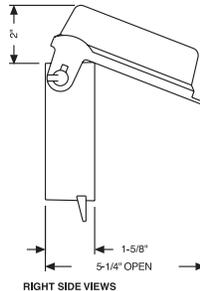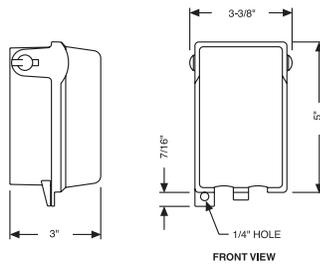

CAT. NO. 5761-0

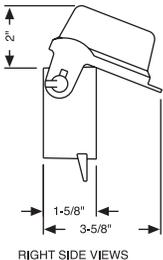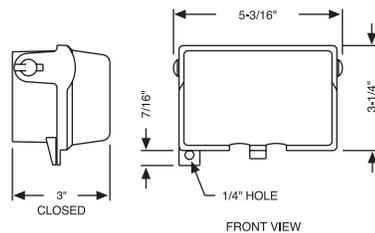

Application

- Rayntite® M.R. II covers are designed for use whenever weatherproof protection is required while an outlet is in use



Product Features

- Modularity: 9 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- High-impact polycarbonate construction: Virtually indestructible — no need to worry about rust and corrosion
- Tinted lid: Hides dust, dirt, and scratches
- Padlockable design: Prevents tampering and accidental disconnects
- Tri-lingual instructions: One product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 410-57 (B) requirements — no need to worry about Code compliances


Compliances

- – Standard 514C
- – C22.2 No. 18
- NEMA 3R Rated
- Meets NEC 410-57(B) requirements

CAT. NOS. 5770-0, 5776-0

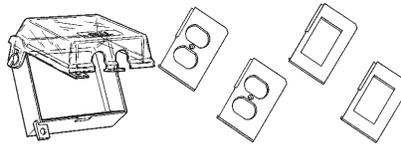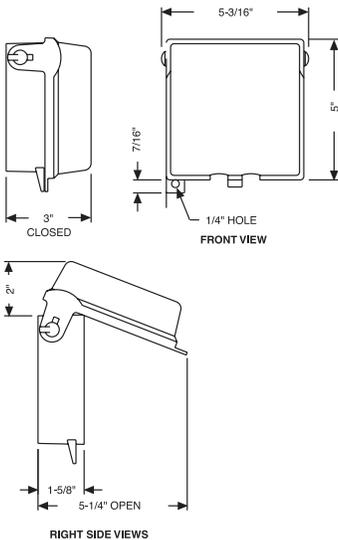

5770-0

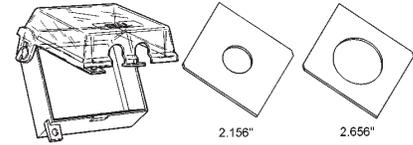

5776-0

ORDERING INFORMATION - DIMENSIONS

TWO-GANG - STANDARD DEPTH				
CATALOG NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5770-0	(2) Duplex (2) GFCI – Vertical Mount	Shrink	5	
5776-0	(1) 2.156" (1) 2.656" plate – Vertical Mount	Shrink	3	

**RAYNTITE® M.R. II SINGLE-GANG
WEATHERPROOF-WHILE-IN-USE COVERS
POLYCARBONATE**



Application


- Rayntite® M.R. II covers are designed for use whenever weatherproof protection is required while an outlet is in use

Product Features


- Modularity — 9 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- High-Impact polycarbonate construction — virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid — hides dust, dirt, and scratches
- Padlockable design — prevents tampering and accidental disconnects
- Tri-lingual instructions — one product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 410-57(B) requirements — no need to worry about Code compliance

Compliances

- – Standard 514C
- – C22.2 No. 18
- NEMA 3R Rated
- Meets NEC 410-57(B) requirements

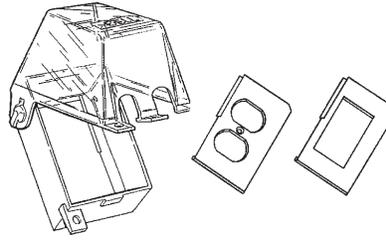

5781-0

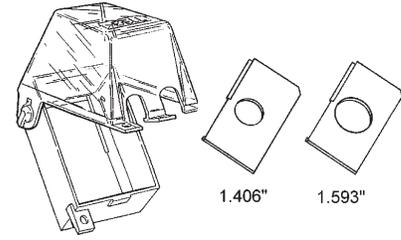


5780-0

ORDERING INFORMATION - DIMENSIONS

SINGLE-GANG - DEEP SIZE				
CATALOG NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5781-0	(1) Duplex (1) GFCI – Vertical Mount	Shrink	6	
5780-0	(1) 1.406" diameter (1) 1.593" diameter Vertical Mount	Shrink	6	

CAT. NOS. 5781-0, 5780-0

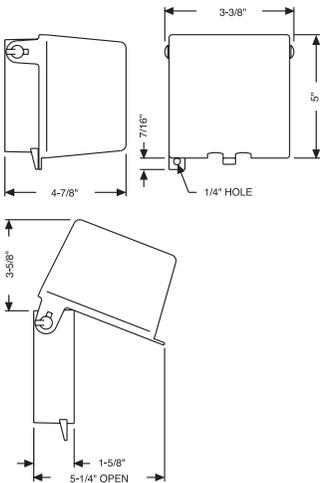




Application

- Rayntite® M.R. II covers are designed for use whenever weatherproof protection is required while an outlet is in use

Product Features

- Modularity — 9 SKU's cover almost every application — no need to tie-up money and shelf space stocking multiple SKU's
- High-Impact polycarbonate construction — virtually indestructible
- No need to worry about rust and corrosion
- Tinted lid — hides dust, dirt, and scratches
- Padlockable design — prevents tampering and accidental disconnects
- Tri-lingual instructions — one product for all North American markets
- Covers can be either device or box mounted — allows for installation flexibility
- Meets NEC 410-57(B) requirements — no need to worry about Code compliance

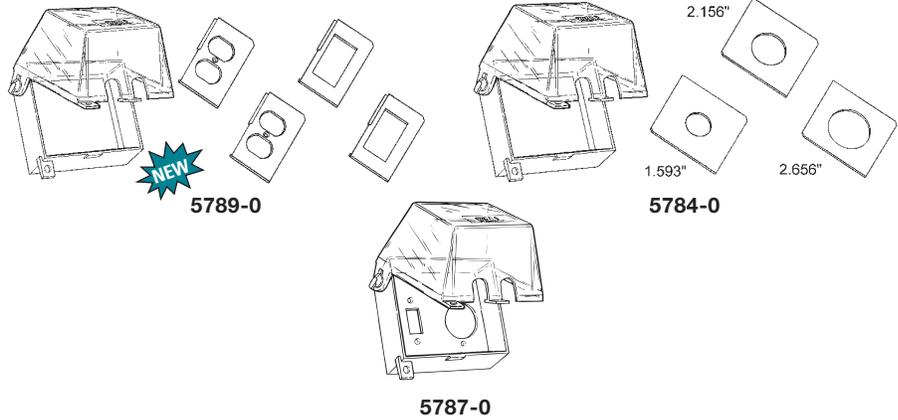


ORDERING INFORMATION - DIMENSIONS

TWO-GANG - DEEP SIZE				
CATALOG NUMBER	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5789-0	(2) Duplex (2) GFCI - Vertical Mount	Shrink	3	
5784-0	(1) 1.593" diameter (1) 2.156" diameter (1) 2.656" diameter - Vertical Mount	Shrink	3	
5787-0	(1) 1.593" diameter (1) Toggle switch Plates mounted to cover — ideal for pool pump installations	Shrink	3	

Compliances

- — Standard 514C
- — C22.2 No. 18
- NEMA 3R Rated
- Meets NEC 410-57(B) requirements

CAT. NOs. 5789-0, 5784-0, 5787-0

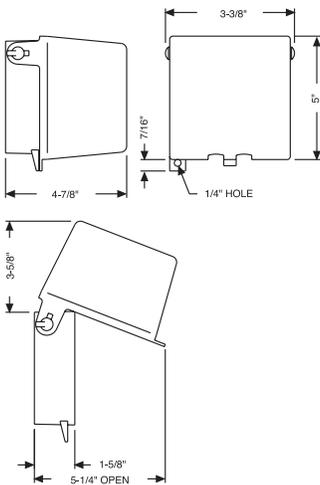

WEATHERPROOF BOXES,
COVERS AND LIGHTING



RAYNTITE® SINGLE-GANG DEVICE COVERS
DIE CAST ALUMINUM



Application


- For use whenever weatherproof protection is required for an outdoor receptacle

Product Features

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Vertical mount covers are padlockable
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions

Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

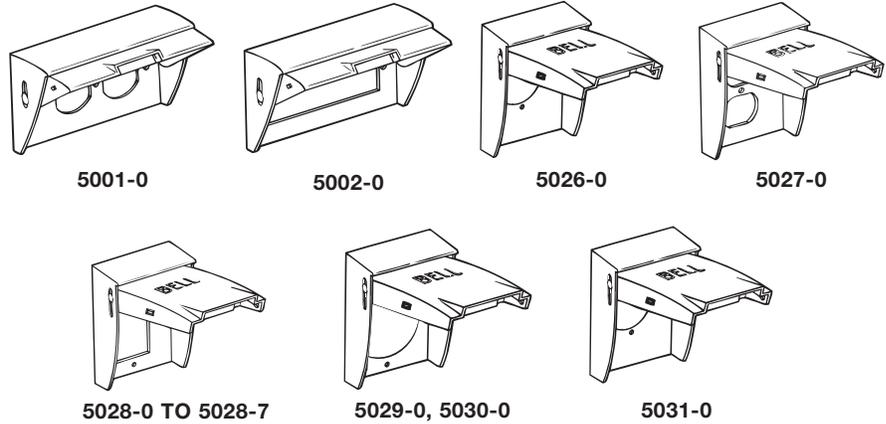


ORDERING INFORMATION - DIMENSIONS


HORIZONTAL MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5001-0	Gray	Duplex	Shrink	24	
5002-0	Gray	GFCI	Shrink	24	

VERTICAL MOUNT - PADLOCKABLE					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5026-0	Gray	Single, 1.593" diameter	Shrink	24	
5027-0	Gray	Duplex	Shrink	24	
5028-0	Gray	GFCI	Shrink	24	
5028-5	Gray	GFCI	Carded	6	
5028-6	White	GFCI	Carded	6	
5028-7	Bronze	GFCI	Carded	6	
5029-0	Gray	20A, 1.710" diameter	Shrink	12	
5030-0	Gray	30-50A, 2.150" diameter	Shrink	12	
5031-0	Gray	Single, 1.406" diameter	Shrink	12	

HORIZONTAL MOUNT COVERS

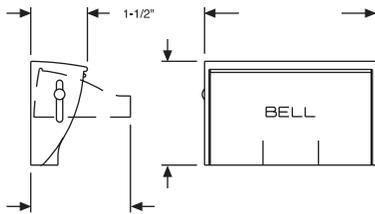

VERTICAL MOUNT COVERS

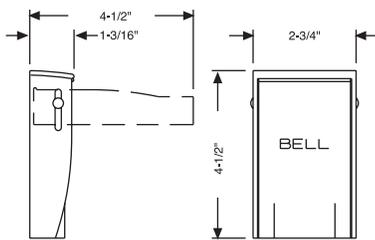

Application

- For use whenever weatherproof protection is required for an outdoor receptacle



Product Features

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weather-proof protection when the receptacle is not in use
- Vertical mount covers are padlockable, 1/4" diameter hole
- May be mounted to box or device
- Includes installation hardware, gasket, and multi-lingual instructions


Compliances

- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

TWO-GANG DEVICE COVERS

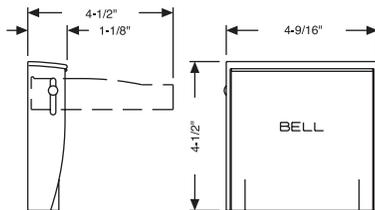

5032-0



5033-0




5034-0




5036-0



5038-0




5040-0



5041-0



5042-0



5043-0



5045-0

ORDERING INFORMATION - DIMENSIONS

VERTICAL MOUNT - PADLOCKABLE					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5032-0	Gray	(2) Duplex	Shrink	6	
5033-0	Gray	(1) Duplex & (1) GFCI	Shrink	6	
5034-0	Gray	(1) 30-50A Receptacle 2.625" diameter	Shrink	6	
5036-0	Gray	(1) 30-50A Receptacle 2.156" diameter	Shrink	6	
5038-0	Gray	(2) Receptacles, 1.406" diameter	Shrink	6	
5040-0	Gray	(1) Single Receptacle, 1.406" diameter & (1) GFCI	Shrink	6	
5041-0	Gray	(2) Toggle	Shrink	6	
5042-0	Gray	(1) Toggle & (1) Duplex	Shrink	6	
5043-0	Gray	(1) Toggle & (1) GFCI	Shrink	6	
5045-0	Gray	(2) GFCI	Shrink	6	

Application


- For use whenever weatherproof protection is required for an outdoor receptacle

Product Features


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weather-proof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

Compliances


- - Standard 514A
- - C22.2 No. 18
- - (5101 series and 5712-5)
- NEMA 3R Rated




5180-0 TO 5180-7




5101-0 TO 5101-7




5152-0



5153-0



5712-5



5094-0


ORDERING INFORMATION - DIMENSIONS

HORIZONTAL - DEVICE MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5180-0	Gray	Duplex	Shrink	24	
5180-1	White	Duplex	Shrink	24	
5180-2	Bronze	Duplex	Shrink	24	
5180-5	Gray	Duplex	Carded	6	
5180-6	White	Duplex	Carded	6	
5180-7	Bronze	Duplex	Carded	6	
5101-0*	Gray	GFCI	Shrink	24	
5101-1*	White	GFCI	Shrink	24	
5101-2*	Bronze	GFCI	Shrink	24	
5101-5*	Gray	GFCI	Carded	6	
5101-6*	White	GFCI	Carded	6	
5101-7*	Bronze	GFCI	Carded	6	
5152-0	Gray	Single, 1.406" diameter	Shrink	24	
5153-0	Gray	Motor plug base, 1.600" diameter, 125V, 15A wiring device included	Shrink	12	
5712-5*	Gray	125V, 15A Duplex receptacle included	Carded	6	


* C/UL Listed

HORIZONTAL - BOX MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5094-0	Gray	Duplex	Shrink	24	


CAT. NOS. 5180-0 SERIES, 5712-5, 5094-0

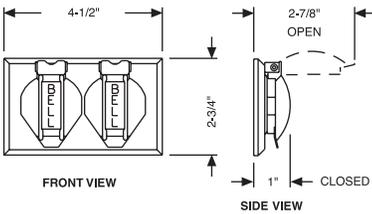

CAT. NO. 5101-0 SERIES

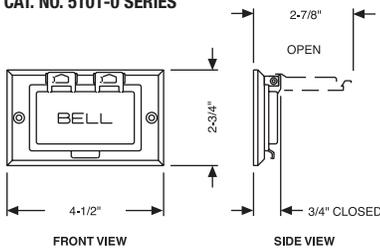

CAT. NOS. 5152-0, 5153-0

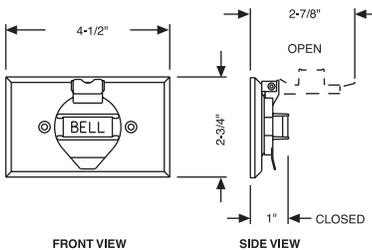



Application


- For use in wet, damp, or dry locations

Product Features


- Each kit is a convenient, complete weatherproof installation — no need to purchase separate components
- Easy to follow multi-lingual instructions included

Compliances

- – Standard 514A
-

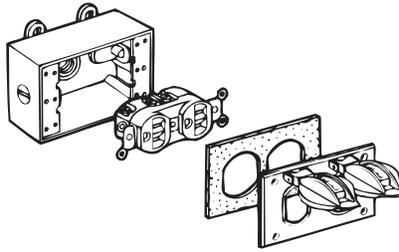

5839-5 TO 5839-7

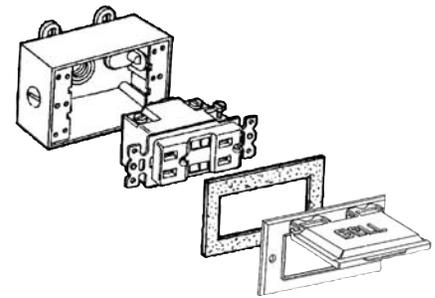

5874-5 TO 5874-7

ORDERING INFORMATION - DIMENSIONS

DEVICE KITS – HORIZONTAL MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5839-5	Gray	Duplex	Box	4	
5839-6	White	Duplex	Box	4	
5839-7	Bronze	Duplex	Box	4	
5874-5	Gray	GFCI	Box	4	
5874-6	White	GFCI	Box	4	
5874-7	Bronze	GFCI	Box	4	

Includes 125V, 15A receptacle, single-gang box, cover and gasket

Application

- For use whenever weatherproof protection is required for an outdoor receptacle


Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weather-proof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

Compliances


- – Standard 514A
- – C22.2 No. 18
- – (5103 series)
- NEMA 3R Rated

GFCI STYLE COVERS

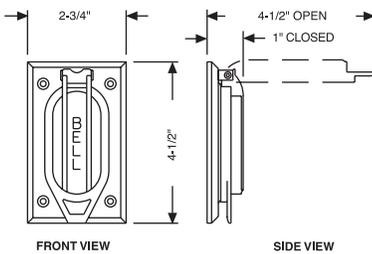


SINGLE RECEPTACLE STYLE COVERS


NOTE: DIMENSIONS FOR DEVICE-MOUNT AND BOX-MOUNT COVERS ARE THE SAME

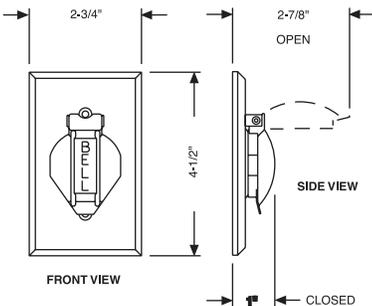

5146-0 TO 5146-5




5103-0 TO 5103-7



5155-0 TO 5155-7



5091-0



5095-0


ORDERING INFORMATION - DIMENSIONS

VERTICAL - DEVICE MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5146-0	Gray	Duplex	Shrink	24	
5146-5	Gray	Duplex	Carded	6	
5103-0*	Gray	GFCI	Shrink	24	
5103-1*	White	GFCI	Shrink	24	
5103-2*	Bronze	GFCI	Shrink	24	
5103-5*	Gray	GFCI	Carded	6	
5103-6*	White	GFCI	Carded	6	
5103-7*	Bronze	GFCI	Carded	6	
5155-0	Gray	Single, 1.406" diameter	Shrink	24	
5155-1	White	Single, 1.406" diameter	Shrink	24	
5155-2	Bronze	Single, 1.406" diameter	Shrink	24	
5155-5	Gray	Single, 1.406" diameter	Carded	6	
5155-6	White	Single, 1.406" diameter	Carded	6	
5155-7	Bronze	Single, 1.406" diameter	Carded	6	

*C/UL Listed

VERTICAL - BOX MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5095-0	Gray	Duplex	Shrink	24	
5091-0	Gray	Single, 1.406" diameter	Shrink	24	

DUPLEX STYLE COVER

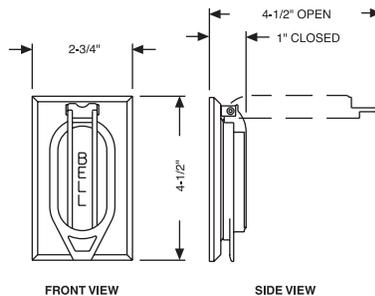



Blank Covers Application

- For use whenever weatherproof protection is required for a single-gang box

Blank Covers Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance

Blank Covers Compliances


- – Standard 514A
- – C22.2 No. 18
- NEMA 3R Rated

Mini-Plate Applications


- For use with light poles
- Provides a safe and convenient means of accessing power for holiday lighting, power tools, and the like

Mini-Plate Product Features


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lid assures weatherproof protection when receptacle is not in use
- Includes installation hardware and receptacle



5173-0 TO
5173-7



5174-0



5183-0

ORDERING INFORMATION - DIMENSIONS


BLANK COVERS - DEVICE MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5173-0	Gray	Blank Cover	Shrink	50	
5173-1	White	Blank Cover	Shrink	50	
5173-2	Bronze	Blank Cover	Shrink	50	
5173-5	Gray	Blank Cover	Carded	12	
5173-6	White	Blank Cover	Carded	12	
5173-7	Bronze	Blank Cover	Carded	12	

BLANK COVERS - BOX MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5174-0	Gray	Blank Cover	Shrink	50	


MINI-PLATE					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5183-0	Black	Curved back, 1-1/2" radius - for 3" diameter pole mounting	Shrink	48	

Includes 125V, 15A 3-wire receptacle

BLANK COVERS

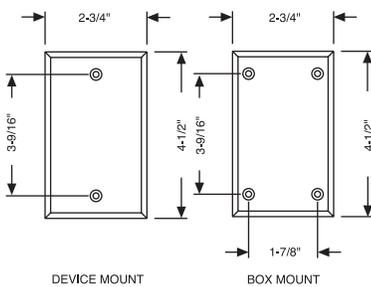

MINI-PLATE

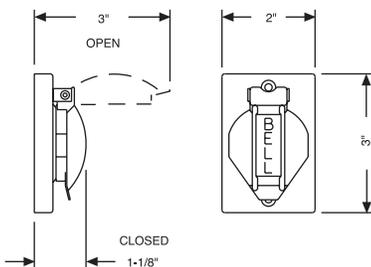

Application


- For use whenever weatherproof protection is required for an outdoor receptacle

Product Features


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weather-proof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions

Compliances

- – Standard 514A
- – C22.2
- NEMA 3R Rated

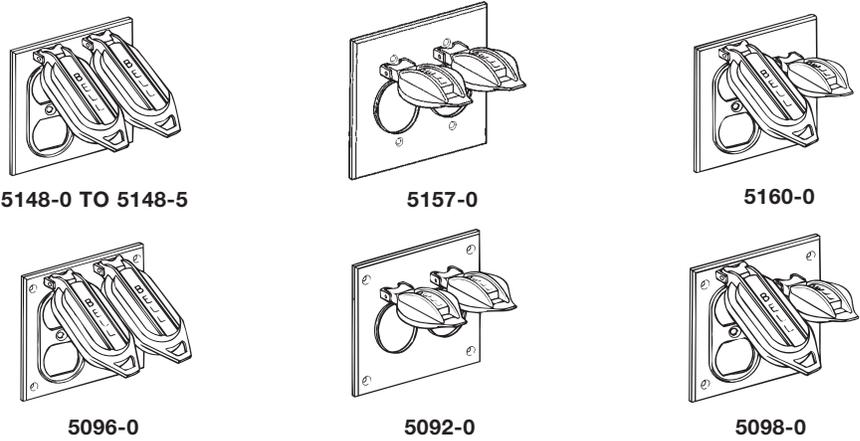


5157-0 SERIES, 5092-0

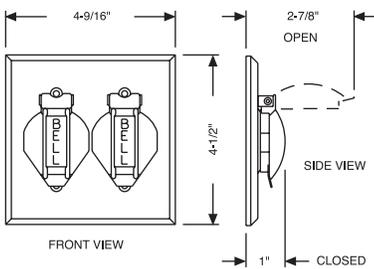

TWO-GANG DEVICE COVERS

5148-0 SERIES, 5096-0 5160-0, 5098-0

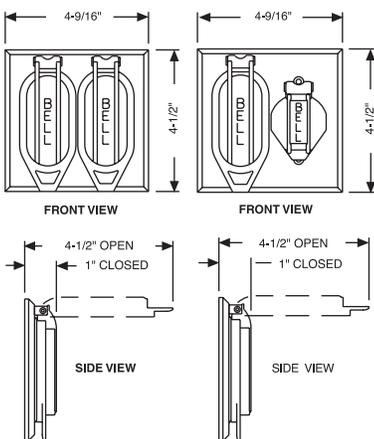

NOTE: DIMENSIONS ARE THE SAME FOR DEVICE MOUNT AND BOX MOUNT STYLES SHOWN.
5157-0 SERIES, 5092-0

ORDERING INFORMATION - DIMENSIONS

DEVICE MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5148-0	Gray	(2) Duplex	Shrink	18	
5148-1	White	(2) Duplex	Shrink	18	
5148-2	Bronze	(2) Duplex	Shrink	18	
5148-5	Gray	(2) Duplex	Carded	4	
5157-0	Gray	(2) Single, 1.406" dia.	Shrink	18	
5160-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12	

BOX MOUNT					
CATALOG NUMBER	COLOR	RECEPTACLE TYPE	PKG. TYPE	STD. PKG.	UPC BAR CODE
5096-0	Gray	(2) Duplex	Shrink	12	
5092-0	Gray	(2) Single, 1.406" dia.	Shrink	12	
5098-0	Gray	(1) Duplex & (1) Single, 1.406" dia.	Shrink	12	



Applications

- For use whenever weatherproof protection is required for an outdoor receptacle
- Blank covers for use whenever weatherproof protection is required for a multi-gang box

Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Self-closing lids assure weatherproof protection when the receptacle is not in use
- Includes installation hardware, gasket, and multi-lingual instructions


Compliances

- – Standard 514A (5097-0, 5175 Series, 5093-0 and 5177-0)
- – C22.2 #18 (5097-0, 5175 Series and 5093-0)
- – 5177-0 (only)
- NEMA 3R Rated

THREE-GANG DEVICE COVERS

5097-0


5093-0

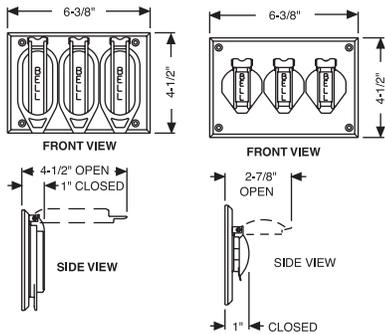


BLANK COVERS

5177-0


5175 SERIES

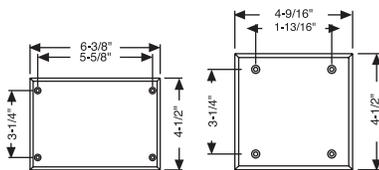


NOTE: DIMENSIONS ARE THE SAME FOR DEVICE MOUNT AND BOX MOUNT STYLES SHOWN.




5097-0



5093-0



5177-0



5175-0 TO 5175-5

ORDERING INFORMATION - DIMENSIONS

THREE-GANG DEVICE COVER – BOX MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5097-0	Gray	(3) Duplex	Boxed	1	
5093-0	Gray	(3) Single, 1.406" dia.	Boxed	1	

THREE-GANG BLANK COVER – BOX MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5177-0	Gray	Blank Cover	Boxed	10	

TWO-GANG BLANK COVER – BOX MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5175-0	Gray	Blank Cover	Shrink	25	
5175-1	White	Blank Cover	Shrink	25	
5175-2	Bronze	Blank Cover	Shrink	25	
5175-5	Gray	Blank Cover	Carded	6	

Application

- For use whenever weatherproof protection is required for an “on-off” type switch




Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions.
- Single-gang covers are supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

Compliances

- – Standard 514A
- – Certified
- NEMA 3R Rated

SINGLE-GANG
5121 SERIES
5141 SERIES
CAT. NOS. 5128-0, 5137-0

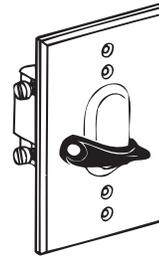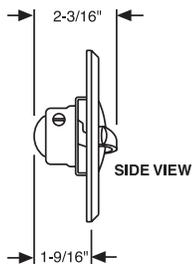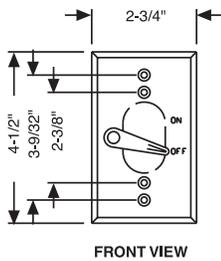

5121-0 TO 5121-7
5141-0 TO 5141-7
5128-0, 5137-0

ORDERING INFORMATION - DIMENSIONS

SINGLE-GANG SWITCH COVERS – VERTICAL – DEVICE MOUNTED					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5121-0	Gray	SP 125V, 10A	Shrink	24	
5121-1	White	SP 125V, 10A	Shrink	24	
5121-2	Bronze	SP 125V, 10A	Shrink	24	
5121-5	Gray	SP 125V, 10A	Carded	6	
5121-6	White	SP 125V, 10A	Carded	6	
5121-7	Bronze	SP 125V, 10A	Carded	6	
5141-0	Gray	3-Way 125V, 6A or 250V, 3A	Shrink	8	
5141-1	White	3-Way 125V, 6A or 250V, 3A	Shrink	8	
5141-2	Bronze	3-Way 125V, 6A or 250V, 3A	Shrink	8	
5141-5	Gray	3-Way 125V, 6A or 250V, 3A	Carded	6	
5141-6	White	3-Way 125V, 6A or 250V, 3A	Carded	6	
5141-7	Bronze	3-Way 125V, 6A or 250V, 3A	Carded	6	
5128-0	Gray	SP 120-277VAC, 20A	Shrink	20	
5137-0	Gray	DP 120-277VAC, 20A	Shrink	20	



Application

- For use whenever weatherproof protection is required for an “on-off” type switch


Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions.
- Most units supplied with a switch — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover

Compliances

- – Standard 514A
- – Certified
- NEMA 3R Rated


TWO-GANG CAT. NO. 5124-0 5125 SERIES

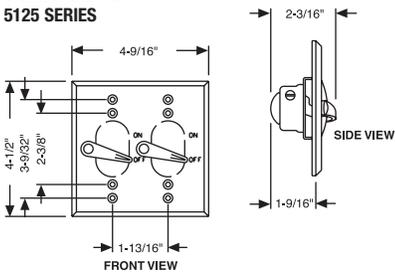

5124-0



5125-0 TO 5125-1




5166-0 TO 5166-5

ORDERING INFORMATION - DIMENSIONS

TWO-GANG SWITCH COVERS - DEVICE MOUNTED					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5124-0	Gray	(2) SP 125V, 10A	Shrink	8	
5125-0	Gray	Cover only	Shrink	8	
5125-1	White	Cover only	Shrink	8	
5166-0	Gray	(1) SP 125V, 10A & (1) Duplex receptacle	Shrink	8	
5166-1	White	(1) SP 125V, 10A & (1) Duplex receptacle	Shrink	8	
5166-2	Bronze	(1) SP 125V, 10A & (1) Duplex receptacle	Shrink	12	
5166-5	Gray	(1) SP 125V, 10A & (1) Duplex receptacle	Carded	4	

TWO-GANG 5166 SERIES

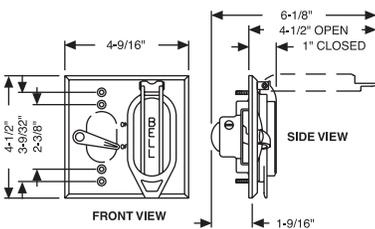

Three-Gang Lever Switch Cover Application

- For use whenever weatherproof protection is required for an “on-off” type switch


Three-Gang Lever Switch Cover Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch resistance
- Includes installation hardware and multi-lingual instructions.
- Three-gang cover is supplied with switches — no need to purchase separate components
- Switch/cover units are supplied with the switch unassembled to the cover



Three-Gang Lever Switch Cover Compliances

- – Standard 514A
- – Certified
- NEMA 3R Rated (5126-0 only)


THREE-GANG CATALOG NO. 5126-0

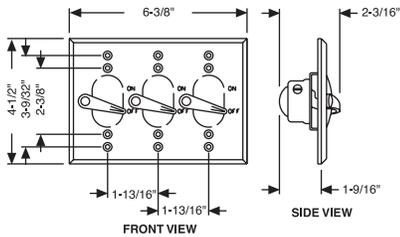


TOGGLE SWITCH CATALOG Nos. 5201-0, 5202-0

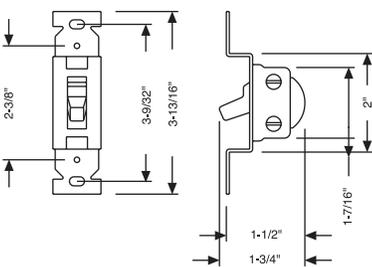

5126-0



5201-0, 5202-0




5204-0

ORDERING INFORMATION - DIMENSIONS

THREE-GANG SWITCH COVER - BOX MOUNT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5126-0	Gray	(3) SP 125V, 10A	Boxed	1	

LEVER SWITCH COVER - ACCESSORIES					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5201-0	—	SP 125V, 10A Toggle switch	Polybag	10	
5202-0	—	3 Way SW, 6A 125V 3A 250V	Polybag	10	
5204-0	—	Spacing ferrule - for mounting, any standard toggle switch to a Bell® lever switch cover. Note- strap ears on the switch must be removed prior to installation	Polybag	100	

SPACING FERRULE CATALOG NO. 5204-0

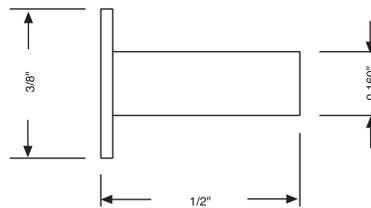



Applications

- For use with Bell® single-gang rectangular or round weather-proof boxes
- Cluster covers provide an easy means of mounting Bell® lampholders and other accessories


Product Features

- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes installation hardware, gasket, and multi-lingual instructions
- Three-hole covers are supplied with two closure plugs



Compliances

- – Standard 514A
- – Certified - C22.2 #18


RECTANGULAR CLUSTER COVERS

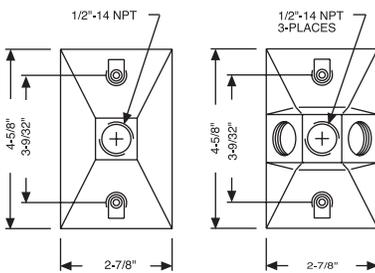

ROUND CLUSTER COVERS

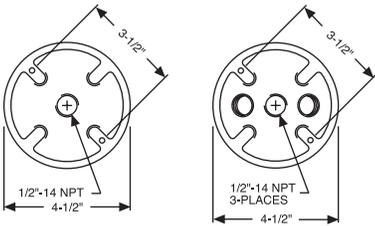


5186-0 TO 5186-7



5189-0 TO 5189-7



5193-0 TO 5193-7



5197-0 TO 5197-7

ORDERING INFORMATION - DIMENSIONS

RECTANGULAR CLUSTER - COVERS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5186-0	Gray	1-1/2" Outlet	Shrink	20	
5186-1	White	1-1/2" Outlet	Shrink	20	
5186-2	Bronze	1-1/2" Outlet	Shrink	20	
5186-5	Gray	1-1/2" Outlet	Carded	6	
5186-6	White	1-1/2" Outlet	Carded	6	
5186-7	Bronze	1-1/2" Outlet	Carded	6	
5189-0	Gray	3-1/2" Outlets	Shrink	20	
5189-1	White	3-1/2" Outlets	Shrink	20	
5189-2	Bronze	3-1/2" Outlets	Shrink	20	
5189-5	Gray	3-1/2" Outlets	Carded	6	
5189-6	White	3-1/2" Outlets	Carded	6	
5189-7	Bronze	3-1/2" Outlets	Carded	6	

4" ROUND CLUSTER - COVERS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5193-0	Gray	1-1/2" Outlet	Shrink	20	
5193-1	White	1-1/2" Outlet	Shrink	20	
5193-2	Bronze	1-1/2" Outlet	Shrink	20	
5193-5	Gray	1-1/2" Outlet	Carded	6	
5193-6	White	1-1/2" Outlet	Carded	6	
5193-7	Bronze	1-1/2" Outlet	Carded	6	
5197-0	Gray	3-1/2" Outlets	Shrink	20	
5197-1	White	3-1/2" Outlets	Shrink	20	
5197-2	Bronze	3-1/2" Outlets	Shrink	20	
5197-5	Gray	3-1/2" Outlets	Carded	6	
5197-6	White	3-1/2" Outlets	Carded	6	
5197-7	Bronze	3-1/2" Outlets	Carded	6	

Applications

- For outdoor or indoor lighting use
- May be used with Bell® cluster covers and boxes


Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming
- Extra long wire leads for easy hook-up
- Each lampholder supplied with a porcelain socket, inside gasket, 1/2" locknut and multi-lingual instructions


Compliances

- - Standard 496, 1570 & 1571
-


5613 SERIES

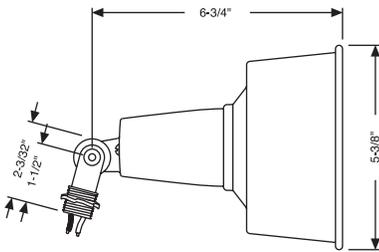

LAMP HOLDERS
5606 SERIES, 5612-0

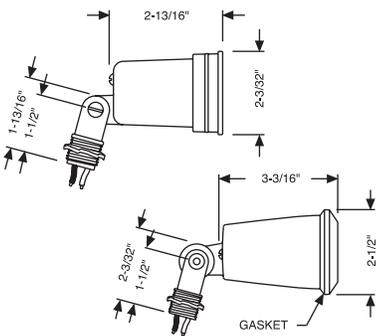


5606-0




5612-0



5611-0



5615-0




5613-0 TO 5613-2

ORDERING INFORMATION - DIMENSIONS


LAMP HOLDERS AND ACCESSORIES FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5606-0	Gray	Lampholder	Shrink	30	
5606-1	White	Lampholder	Shrink	30	
5606-2	Bronze	Lampholder	Shrink	30	
5606-5	Gray	Lampholder	Carded	6	
5606-6	White	Lampholder	Carded	6	
5606-7	Bronze	Lampholder	Carded	6	
5612-0	Gray	Lampholder w/gasket	Shrink	30	
5611-0	—	Outer gasket only, replacement gasket for 5612-0	Polybag	30	
5615-0	—	Wire guard only	Shrink	5	

ARCHITECTURAL LAMP HOLDERS FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5613-0	Gray	Lampholder	Shrink	4	
5613-1	White	Lampholder	Shrink	4	
5613-2	Bronze	Lampholder	Shrink	4	

CATALOG NO. 5611-0

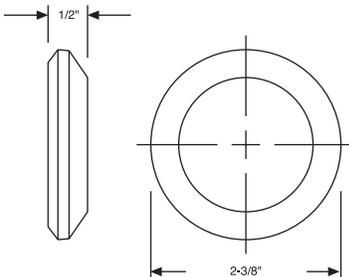

CATALOG NO. 5615-0

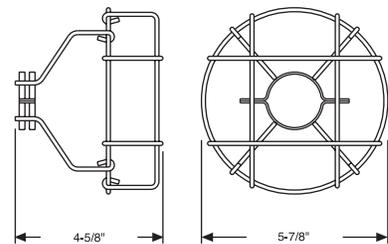



Portable Lampholder

Application

- For general outdoor lighting use

Portable Lampholder

Product Features

- Rugged die-cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming

Bullet Lampholder Applications

- For general outdoor lighting use
- May be used with Bell® cluster covers and boxes


Bullet Lampholder

Product Features

- Rugged die-cast construction
- Locking swivel knuckle assures positive lamp positioning and provides pin-point directional aiming
- Includes installation hardware and multi-lingual instructions

Bullet Lampholder Compliances

- – Standard 514A
- – (5820 series only)

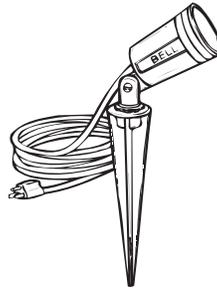

5792-0




5820-5 TO 5820-8

ORDERING INFORMATION - DIMENSIONS


PORTABLE LAMP HOLDER ASSEMBLY					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5792-0	Gray	Spike, 6 ft. cord & plug	Polybag	12	

BULLET LAMP HOLDERS – FOR 75-150 WATT PAR 38 AND R-40 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5820-5	Gray	Lampholder, extension & lens kit	Boxed	2	
5820-7	Bronze	Lampholder, extension & lens kit	Boxed	2	
5820-8	Green	Lampholder, extension & lens kit	Boxed	2	

PORTABLE LAMP HOLDER ASSEMBLY 5792-0

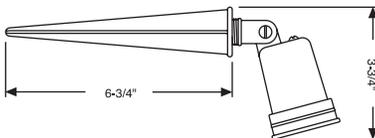

BULLET LAMP HOLDERS

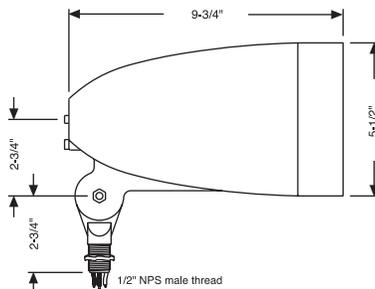

WEATHERPROOF BOXES,
COVERS AND LIGHTING



Application

- For use with Bell® single-gang rectangular or round weather-proof boxes

Product Features


- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Each combination kit is a complete weatherproof installation — no need to purchase separate components
- Includes installation hardware, gasket, and multi-lingual instructions

Bullet Lampholder Complies

- – Standard 496, 1570 & 1571
-




5620-0 TO 5620-7

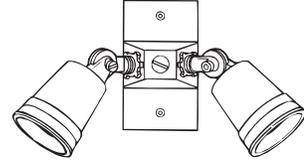

5621-0 TO 5621-7




5624-0 TO 5624-7

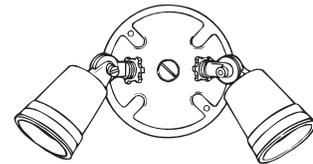


5625-0 TO 5625-7


5620 SERIES

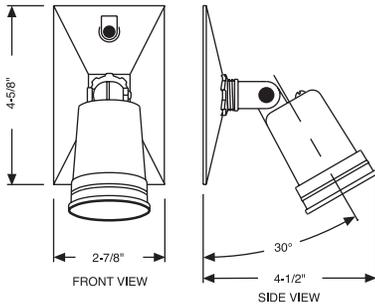

5621 SERIES

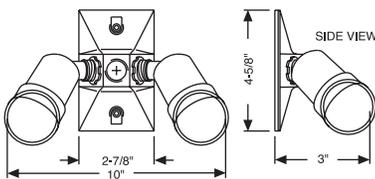

5624 SERIES

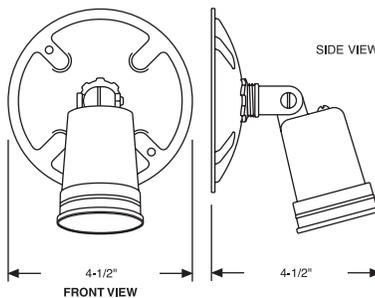


ORDERING INFORMATION - DIMENSIONS

RECTANGULAR COVER – COMBINATIONS FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5620-0	Gray	(1) Lampholder	Shrink	8	
5620-1	White	(1) Lampholder	Shrink	8	
5620-2	Bronze	(1) Lampholder	Shrink	8	
5620-6	White	(1) Lampholder	Carded	4	
5620-7	Bronze	(1) Lampholder	Carded	4	
5621-0	Gray	(2) Lampholders	Shrink	8	
5621-1	White	(2) Lampholders	Shrink	8	
5621-2	Bronze	(2) Lampholders	Shrink	8	
5621-5	Gray	(2) Lampholders	Carded	4	
5621-6	White	(2) Lampholders	Carded	4	
5621-7	Bronze	(2) Lampholders	Carded	4	

4" ROUND COVER – COMBINATIONS FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5624-0	Gray	(1) Lampholder	Shrink	8	
5624-1	White	(1) Lampholder	Shrink	8	
5624-2	Bronze	(1) Lampholder	Shrink	8	
5624-5	Gray	(1) Lampholder	Carded	4	
5624-6	White	(1) Lampholder	Carded	4	
5624-7	Bronze	(1) Lampholder	Carded	4	
5625-0	Gray	(2) Lampholders	Shrink	8	
5625-1	White	(2) Lampholders	Shrink	8	
5625-2	Bronze	(2) Lampholders	Shrink	8	
5625-5	Gray	(2) Lampholders	Carded	4	
5625-6	White	(2) Lampholders	Carded	4	
5625-7	Bronze	(2) Lampholders	Carded	4	

5625 SERIES

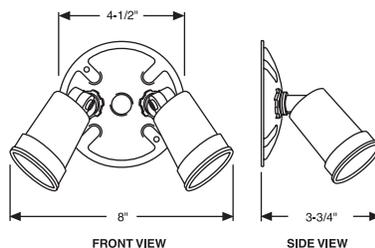

Application


- For general use in wet, damp, or dry locations

Product Features

- Each kit is a complete weather-proof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

Compliances

- – Standard 496, 1570 & 1571
-

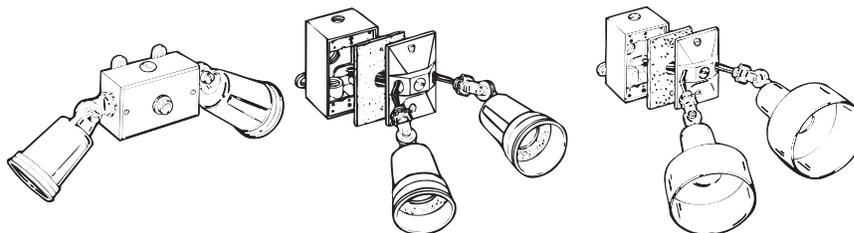

5883-5 TO 5883-7

5818-5 TO 5818-7

5882-5 TO 5882-7

ORDERING INFORMATION - DIMENSIONS

RECTANGULAR LIGHT KITS FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5883-5	Gray	Box, cover photocell & (2) lampholders	Boxed	4	
5883-6	White	Box, cover photocell & (2) lampholders	Boxed	4	
5883-7	Bronze	Box, cover photocell & (2) lampholders	Boxed	4	
5818-5	Gray	Box, cover & (2) lampholders	Boxed	4	
5818-6	White	Box, cover & (2) lampholders	Boxed	4	
5818-7	Bronze	Box, cover & (2) lampholders	Boxed	4	
5882-5	Gray	Box, cover & (2) architectural lampholders	Boxed	4	
5882-6	White	Box, cover & (2) architectural lampholders	Boxed	4	
5882-7	Bronze	Box, cover & (2) architectural lampholders	Boxed	4	

LIGHT KITS



Application


- For general use in wet, damp, or dry locations

Product Features


- Each kit is a complete weather-proof installation — no need to purchase separate components
- Each kit includes easy-to-follow multi-lingual instructions
- All kit components are described in the preceding pages

Compliances


- – Standard 496, 1570 & 1571
-




5841-5 TO 5841-7

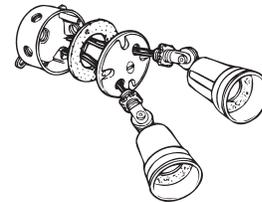

5829-5 TO 5829-7



5876-5 TO 5876-7



5880-5 TO 5880-7

ORDERING INFORMATION - DIMENSIONS

4" ROUND LIGHT KITS FOR 75-150 WATT PAR 38 LAMPS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5841-5	Gray	Cover, photocell & (2) lampholders	Boxed	4	
5841-6	White	Cover, photocell & (2) lampholders	Boxed	4	
5841-7	Bronze	Cover, photocell & (2) lampholders	Boxed	4	
5829-5	Gray	Box, cover & (2) lampholders	Boxed	4	
5829-6	White	Box, cover & (2) lampholders	Boxed	4	
5829-7	Bronze	Box, cover & (2) lampholders	Boxed	4	
5876-5	Gray	Box, cover & (2) architectural lampholders	Boxed	4	
5876-6	White	Box, cover & (2) architectural lampholders	Boxed	4	
5876-7	Bronze	Box, cover & (2) architectural lampholders	Boxed	4	
5880-5	Gray	Cover & (2) architectural lampholders	Boxed	4	
5880-6	White	Cover & (2) architectural lampholders	Boxed	4	
5880-7	Bronze	Cover & (2) architectural lampholders	Boxed	4	

WEATHERPROOF BOXES, COVERS AND LIGHTING





Application


- For accent lighting along walkways, driveways, terraces, porches and garden areas

Product Features


- Rugged die cast construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance
- Includes screw-in clear glass globe, wire connectors, gasket, and multi-lingual instructions
- Three-tier lights accept 40W maximum lamps
- Four-tier lights accept 60W maximum lamps

Compliances


- – Standard 496, 1570 & 1571
-




5884-7 TO 5884-8



5819-7




5893-7 TO 5893-8

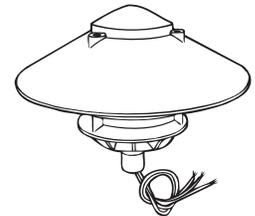

5895-7 TO 5895-8

ORDERING INFORMATION - DIMENSIONS


INCANDESCENT TYPE THREADED 1/2" NPT - 18" LEADS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5884-7	Bronze	3-Tier	Box	2	
5884-8	Green	3-Tier	Box	2	
5893-7	Bronze	4-Tier	Box	2	
5893-8	Green	4-Tier	Box	2	
5895-7	Bronze	Wide, 3-tier	Box	2	
5895-8	Green	Wide, 3-tier	Box	2	
5819-7	Bronze	Wide, 4-tier	Box	2	

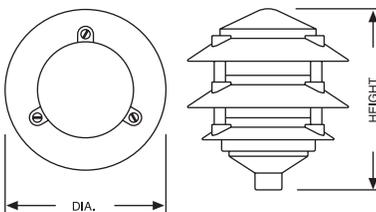

DIMENSIONS		
CATALOG NUMBER	DIA.	HEIGHT
5884	6"	7"
5893	6"	8-3/4"
5895	10"	7-1/4"
5819	10"	9-1/8"

Aluminum Conduit Bodies Applications

- For use on threaded rigid/IMC conduit
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

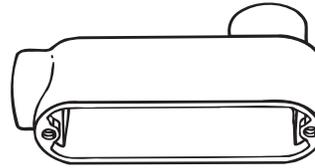

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple

Compliances


- – Standard 514B
- – C22.2 #18

TYPE LB

ORDERING INFORMATION - DIMENSIONS

TYPE LB				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EALB-1	1/2"	10	100	—
EALB-2	3/4"	10	50	—
EALB-3	1"	6	24	—
EALB-4	1-1/4"	2	8	—
EALB-5	1-1/2"	2	8	—
EALB-6	2"	1	5	—
EALB-7	2-1/2"	—	1	—
EALB-8	3"	—	1	—
EALB-9	3-1/2"	—	1	—
EALB-10	4"	—	1	—


TYPE LB

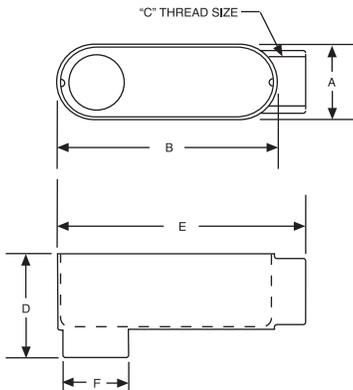

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
1-1/2"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"
2-1/2"	4-9/16"	12-1/4"	2-1/2"	5-13/16"	13-1/8"	3-7/16"
3"	4-9/16"	12-1/4"	3"	5-13/16"	13-1/8"	4-7/64"
3-1/2"	5-7/16"	14-7/8"	3-1/2"	7-1/4"	15-3/8"	5-9/64"
4"	5-7/16"	14-7/8"	4"	7-1/4"	15-3/8"	5-9/64"

Aluminum Conduit Bodies Applications

- For use on threaded rigid/IMC conduit
- Use Type C conduit bodies for connecting conduit sections as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

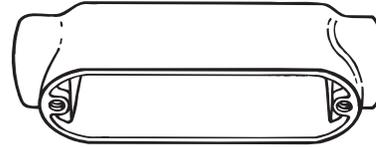

TYPE C

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple


Compliances

- - Standard 514B
- - C22.2 #18

ORDERING INFORMATION - DIMENSIONS

TYPE C				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EAC-1	1/2"	10	100	—
EAC-2	3/4"	10	50	—
EAC-3	1"	6	24	—
EAC-4	1-1/4"	2	8	—
EAC-5	1-1/2"	2	8	—
EAC-6	2"	1	5	—
EAC-7	2-1/2"	—	1	—
EAC-8	3"	—	1	—
EAC-9	3-1/2"	—	1	—
EAC-10	4"	—	1	—


TYPE C

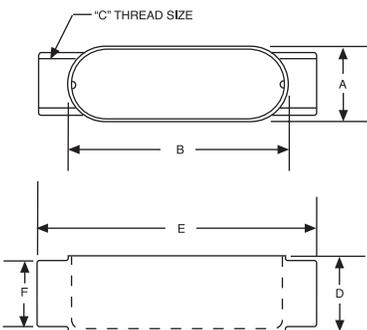

DIMENSIONS							
CONDUIT SIZE	A	B	C	D	E	F	
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"	
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"	
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"	
1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	2-1/4"	
1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	2-1/4"	
2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	2-15/16"	
2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	3-7/16"	
3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	4-7/64"	
3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	5-9/64"	
4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	5-9/64"	

Aluminum Conduit Bodies Applications

- For use on threaded rigid/IMC conduit
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

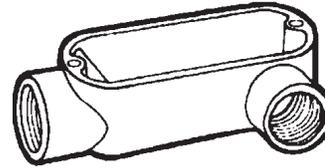

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple

Compliances


- – Standard 514B
- – C22.2 #18

TYPE LL

ORDERING INFORMATION - DIMENSIONS

TYPE LL				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EALL-1	1/2"	10	100	—
EALL-2	3/4"	10	50	—
EALL-3	1"	6	24	—
EALL-4	1-1/4"	2	8	—
EALL-5	1-1/2"	2	8	—
EALL-6	2"	1	5	—
EALL-7	2-1/2"	—	1	—
EALL-8	3"	—	1	—
EALL-9	3-1/2"	—	1	—
EALL-10	4"	—	1	—


TYPE LL

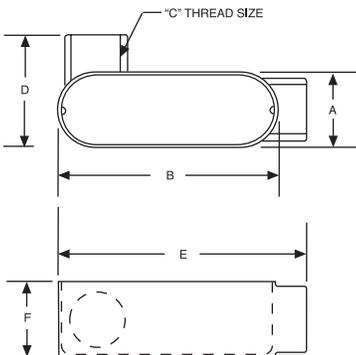

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"
2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"
3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"
3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"
4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"

Aluminum Conduit Bodies Applications

- For use on threaded rigid/IMC conduit
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

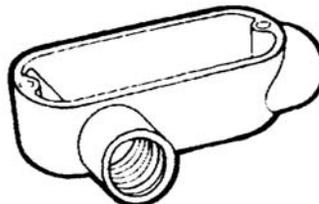

TYPE LR

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple


Compliances

- - Standard 514B
- - C22.2 #18

ORDERING INFORMATION - DIMENSIONS

TYPE LR				
CATALOG NUMBER	TRADE SIZE	UNIT CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EALR-1	1/2"	10	100	—
EALR-2	3/4"	10	50	—
EALR-3	1"	6	24	—
EALR-4	1-1/4"	2	8	—
EALR-5	1-1/2"	2	8	—
EALR-6	2"	1	5	—
EALR-7	2-1/2"	—	1	—
EALR-8	3"	—	1	—
EALR-9	3-1/2"	—	1	—
EALR-10	4"	—	1	—


TYPE LR

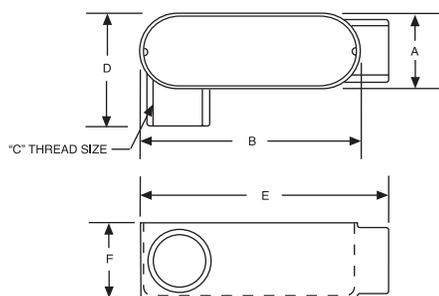

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"
2-1/2"	4-9/16"	12-1/4"	2-1/2"	6"	13-1/8"	4"
3"	4-9/16"	12-1/4"	3"	6"	13-1/8"	4-3/4"
3-1/2"	5-7/16"	14-7/8"	3-1/2"	6-1/4"	15-3/8"	5-1/2"
4"	5-7/16"	14-7/8"	4"	6-1/4"	15-3/8"	5-1/2"

Aluminum Conduit Bodies Applications

- For use on threaded rigid/IMC conduit
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

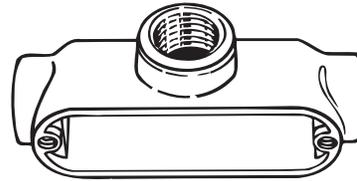

TYPE T

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, make installation simple


Compliances

- – Standard 514B
- – C22.2 #18

ORDERING INFORMATION - DIMENSIONS

TYPE T				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EAT-1	1/2"	10	100	—
EAT-2	3/4"	10	50	—
EAT-3	1"	6	24	—
EAT-4	1-1/4"	2	8	—
EAT-5	1-1/2"	2	8	—
EAT-6	2"	1	5	—
EAT-7	2-1/2"	—	1	—
EAT-8	3"	—	1	—
EAT-9	3-1/2"	—	1	—
EAT-10	4"	—	1	—

TYPE T

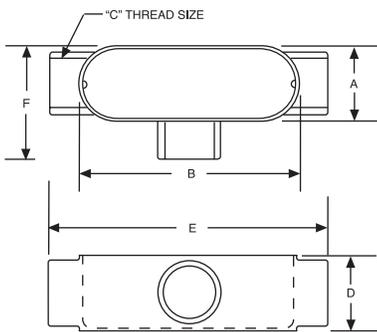


DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"
2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/32"
2-1/2"	4-9/16"	12-1/4"	2-1/2"	4"	14"	6-1/4"
3"	4-9/16"	12-1/4"	3"	4-3/4"	13-1/2"	6-1/4"
3-1/2"	5-7/16"	14-7/8"	3-1/2"	5-1/2"	15-29/32"	7"
4"	5-7/16"	14-7/8"	4"	5-1/2"	15-29/32"	7"



Aluminum Conduit Bodies Applications

- For use with EMT conduit in dry locations
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

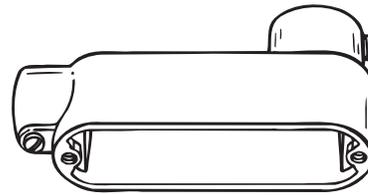

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple

Compliances


- - Standard 514B
- - C22.2 #18

TYPE LB

ORDERING INFORMATION - DIMENSIONS

TYPE LB				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EBLB-1	1/2"	10	100	—
EBLB-2	3/4"	10	50	—
EBLB-3	1"	6	24	—
EBLB-4	1-1/4"	2	8	—
EBLB-5	1-1/2"	2	8	—
EBLB-6	2"	1	5	—
EBLB-7	2-1/2"	—	1	—
EBLB-8	3"	—	1	—
EBLB-9	3-1/2"	—	1	—
EBLB-10	4"	—	1	—

TYPE LB

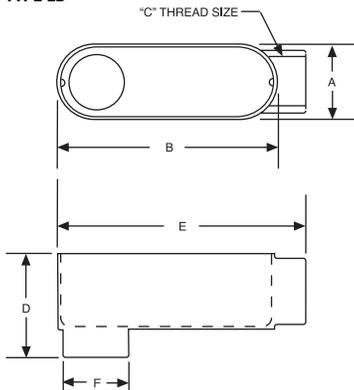

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-3/4"	6-7/8"	2-1/4"
2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"
2-1/2"	4-9/16"	12-1/4"	2-1/2"	5-13/16"	13-1/8"	3-7/16"
3"	4-9/16"	12-1/4"	3"	5-13/16"	13-1/8"	4-7/64"
3-1/2"	5-7/16"	14-7/8"	3-1/2"	7-1/4"	15-3/8"	5-9/64"
4"	5-7/16"	14-7/8"	4"	7-1/4"	15-3/8"	5-9/64"

“E” SERIES CONDUIT BODIES
ALUMINUM – SET SCREW TYPE FOR EMT



Aluminum Conduit Bodies Applications



- For use with EMT conduit in dry locations
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

Aluminum Conduit Bodies Product Features

- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple

Compliances

- – Standard 514B
- – C22.2 #18

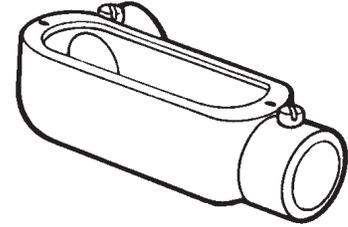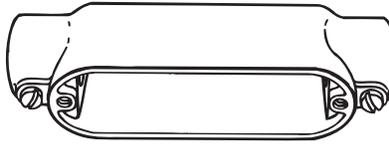

TYPE C

TYPE LL

ORDERING INFORMATION - DIMENSIONS


TYPE C				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EBC-1	1/2"	10	100	—
EBC-2	3/4"	10	50	—
EBC-3	1"	6	24	—
EBC-4	1-1/4"	2	8	—
EBC-5	1-1/2"	2	8	—
EBC-6	2"	1	5	—

DIMENSIONS – TYPE C						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	2-1/4"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	2-1/4"
2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	2-15/16"


TYPE LL				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EBLL-1	1/2"	10	100	—
EBLL-2	3/4"	10	50	—
EBLL-3	1"	6	24	—
EBLL-4	1-1/4"	2	8	—
EBLL-5	1-1/2"	2	8	—
EBLL-6	2"	1	5	—

DIMENSIONS – TYPE LL						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-15/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"

TYPE C

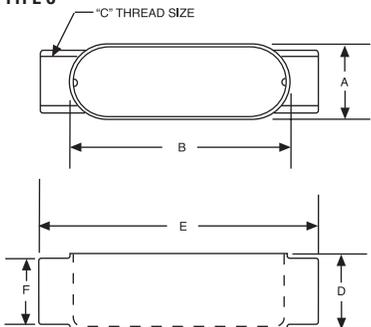

TYPE LL

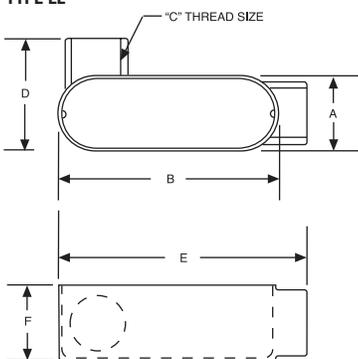



Aluminum Conduit Bodies Applications


- For use with EMT conduit in dry locations
- Use conduit bodies for making turns in conduit systems, connecting conduit sections, as pull outlets, and to provide openings for maintenance and making taps and splices to conductors

Aluminum Conduit Bodies Product Features


- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple

Compliances

- - Standard 514B
- - C22.2 #18

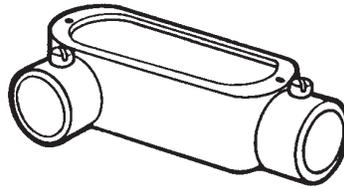

TYPE LR

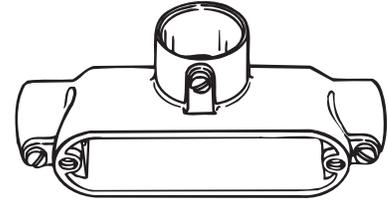

TYPE T



ORDERING INFORMATION - DIMENSIONS

TYPE LR				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EBLR-1	1/2"	10	100	—
EBLR-2	3/4"	10	50	—
EBLR-3	1"	6	24	—
EBLR-4	1-1/4"	2	8	—
EBLR-5	1-1/2"	2	8	—
EBLR-6	2"	1	5	—

DIMENSIONS - TYPE LR						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-15/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-15/32"	6-7/8"	2-7/8"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-15/32"	6-7/8"	2-7/8"
2"	3-1/8"	8-1/2"	2"	3-7/8"	9-7/32"	3-7/16"

TYPE T				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EBT-1	1/2"	10	100	—
EBT-2	3/4"	10	50	—
EBT-3	1"	6	24	—
EBT-4	1-1/4"	2	8	—
EBT-5	1-1/2"	2	8	—
EBT-6	2"	1	5	—

DIMENSIONS - TYPE T						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"
2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/32"

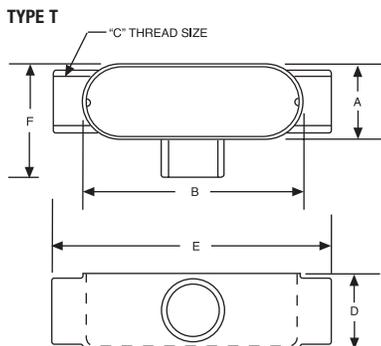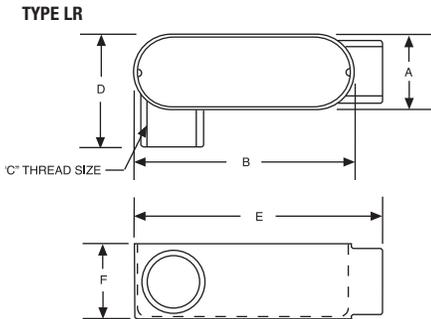

WEATHERPROOF BOXES,
COVERS AND LIGHTING



Conduit Body Covers Application

- For use with aluminum conduit bodies



Conduit Body Covers
Product Features

- Lightweight aluminum construction provides corrosion resistance and easy installation
- Covers are furnished with zinc plated screws — no worry about removing a cover once it is installed



Compliances

- – Standard 514B
- – C22.2 #18

Conduit Body Gaskets
Application

- For use with conduit bodies and covers to provide a raintight seal

Conduit Body Gaskets
Product Feature

- Two choices of gasket materials available: fiber or neoprene

Compliances

- – Standard 514B
- – C22.2 #18

ESCV SERIES

EGKV AND EGKN SERIES


ORDERING INFORMATION - DIMENSIONS

COVERS – ALUMINUM				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
ESCV-1	1/2"	10	100	—
ESCV-2	3/4"	10	100	—
ESCV-3	1"	10	100	—
ESCV-4	1-1/4" – 1-1/2"	10	50	—
ESCV-5	2"	—	50	—
ESCV-6	2-1/2" – 3"	—	5	—
ESCV-7	3-1/2" – 4"	—	5	—

GASKETS – FIBER TYPE				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EGKV-1	1/2"	100	1000	—
EGKV-2	3/4"	100	1000	—
EGKV-3	1"	100	1000	—
EGKV-4	1-1/4" – 1-1/2"	50	500	—
EGKV-5	2"	50	500	—

GASKETS – NEOPRENE TYPE				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EGKN-1	1/2"	100	1000	—
EGKN-2	3/4"	100	1000	—
EGKN-3	1"	100	1000	—
EGKN-4	1-1/4" – 1-1/2"	50	500	—
EGKN-5	2"	50	500	—
EGKN-6	2-1/2" – 3"	—	10	—
EGKN-7	3-1/2" – 4"	—	10	—


DIMENSIONS			
CATALOG NUMBER	TRADE SIZE	A	B
ESCV-1	1/2"	1-3/8"	3-29/32"
ESCV-2	3/4"	1-9/16"	4-11/16"
ESCV-3	1"	1-25/32"	5-3/8"
ESCV-4	1-1/4" – 1-1/2"	2-1/2"	7-1/4"
ESCV-5	2"	3-1/8"	9-1/2"
ESCV-6	2-1/2" – 3"	4-1/2"	12-1/4"
ESCV-7	3-1/2" – 4"	5-29/64"	14-13/64"

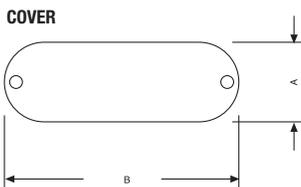

WEATHERPROOF BOXES,
COVERS AND LIGHTING

Conduit Entrance Ells Application

- For use with conduit to act as an elbow between service entrance and vertical entrance cap conduit runs



Conduit Entrance Ells Product Features

- Lightweight aluminum construction eases installation and provides a corrosion resistance
- Removable cover and gasket allows for easier wire pulling and access to the raceway

EASLB SERIES



Compliances

- - Standard 514B
- - C22.2 #18

ORDERING INFORMATION - DIMENSIONS

ENTRANCE ELLS ALUMINUM				
CATALOG NUMBER	TRADE SIZE	UNITY CTN. QTY.	SHIP CTN. QTY.	UPC BAR CODE
EASLB-1	1/2"	10	50	—
EASLB-2	3/4"	10	50	—
EASLB-3	1"	6	24	—
EASLB-4	1-1/4"	2	8	—
EASLB-5	1-1/2"	2	8	—
EASLB-6	2"	1	5	—

SERVICE ENTRANCE

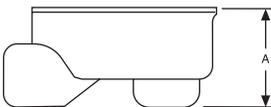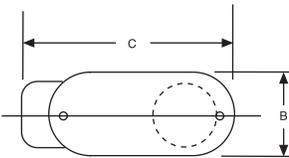

DIMENSIONS				
CATALOG NUMBER	TRADE SIZE	A	B	C
EASLB-1	1/2"	1-5/8"	1-13/32"	3-9/32"
EASLB-2	3/4"	1-16/64"	1-45/64"	3-13/16"
EASLB-3	1"	2-1/8"	1-9/16"	4-5/16"
EASLB-4	1-1/4"	2-9/16"	2-7/16"	5-9/16"
EASLB-5	1-1/2"	2-19/32"	2-5/8"	6-1/4"
EASLB-6	2"	3-1/8"	3-5/64"	6-3/4"


E-PAK™ CONDUIT BODIES
ALUMINUM – THREADED WITH COVER
AND GASKET INCLUDED



Aluminum Conduit Bodies with Cover and Gasket Applications



- For use on threaded rigid/IMC conduit
- Use conduit outlet bodies for connecting conduit sections, for making bends in conduit runs, as pull outlets, or to provide openings for making splices and taps in conductors

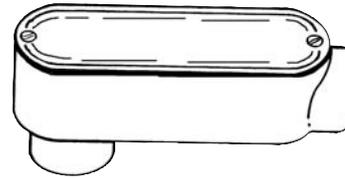

TYPE LB

Aluminum Conduit Bodies with Cover and Gasket Product Features

- Assembled with cover and gasket to speed installation — installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton
- Bell® conduit bodies are UPC-A bar coded for sales and inventory control


Compliances

- – Standard 514B
- – C22.2 #18

ORDERING INFORMATION - DIMENSIONS

TYPE LB					
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE	
EALB-1CG	1/2"	12	E-PAK		
EALB-2CG	3/4"	15	E-PAK		
EALB-3CG	1"	5	E-PAK		
EALB-4CG	1-1/4"	5	E-PAK		
EALB-5CG	1-1/2"	5	E-PAK		
EALB-6CG	2"	2	E-PAK		

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	3-3/4"	6-7/8"	2-1/4"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	3-3/4"	6-7/8"	2-1/4"
2"	3-1/8"	8-1/2"	2"	4-1/8"	9-7/32"	2-15/16"

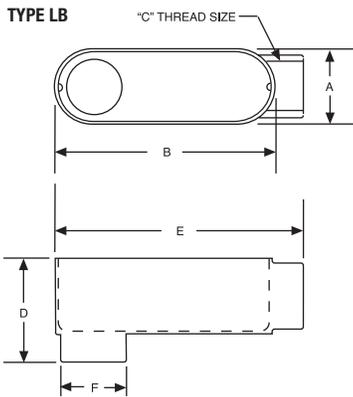


Aluminum Conduit Bodies with Cover and Gasket Applications



- For use on threaded rigid/IMC conduit
- Use Type C conduit outlet bodies as pull outlets, or to provide openings for making splices and taps in conductors

Aluminum Conduit Bodies with Cover and Gasket Product Features

- Assembled with cover and gasket to speed installation — installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton
- Bell® conduit bodies are UPC-A bar coded for sales and inventory control

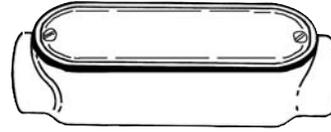

TYPE C

ORDERING INFORMATION - DIMENSIONS


TYPE C				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EAC-1CG	1/2"	12	E-PAK	
EAC-2CG	3/4"	15	E-PAK	
EAC-3CG	1"	5	E-PAK	

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	1-11/32"
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	1-21/32"

Compliances



- – Standard 514B
- – C22.2 #18

TYPE C

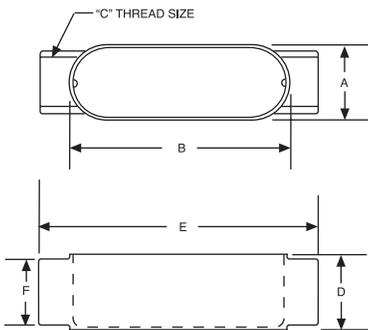

Aluminum Conduit Bodies with Cover and Gasket Applications

- For use on threaded rigid/IMC conduit
- Use conduit outlet bodies for connecting conduit sections, for making bends in conduit runs, as pull outlets, or to provide openings for making splices and taps in conductors

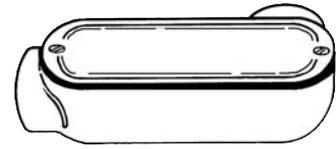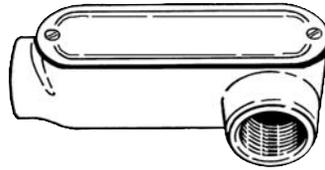

Aluminum Conduit Bodies with Cover and Gasket
Product Features

- Assembled with cover and gasket to speed installation — installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton
- Bell® conduit bodies are UPC-A bar coded for sales and inventory control

Compliances

- – Standard 514B
- – C22.2 #18

TYPE LL

TYPE LR

ORDERING INFORMATION - DIMENSIONS


TYPE LL				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EALL-1CG	1/2"	12	E-PAK	
EALL-2CG	3/4"	15	E-PAK	
EALL-3CG	1"	5	E-PAK	

DIMENSIONS - TYPE LL						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"


TYPE LR				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EALR-1CG	1/2"	12	E-PAK	
EALR-2CG	3/4"	15	E-PAK	
EALR-3CG	1"	5	E-PAK	

DIMENSIONS - TYPE LR						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-3/64"	4-3/8"	1-7/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-5/16"	5-1/8"	1-11/16"
1"	1-3/4"	5-3/8"	1"	2-21/32"	5-15/16"	1-15/16"

TYPE LL

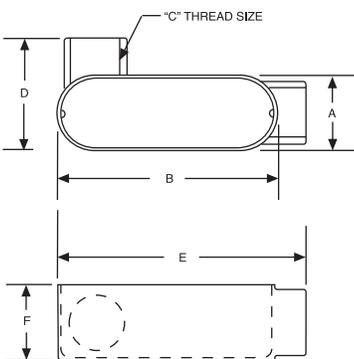

TYPE LR

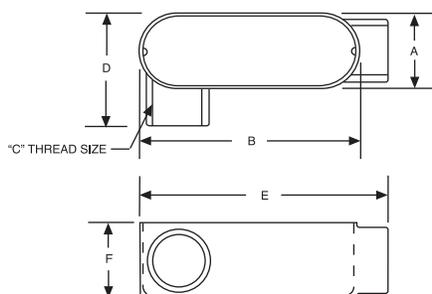




Aluminum Conduit Bodies with Cover and Gasket Applications



- For use on threaded rigid/IMC conduit
- Use conduit outlet bodies for connecting conduit sections, for making bends in conduit runs, as pull outlets, or to provide openings for making splices and taps in conductors

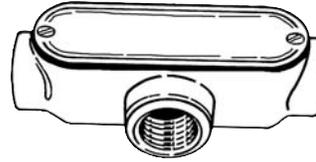

TYPE T

Aluminum Conduit Bodies with Cover and Gasket
Product Features

- Assembled with cover and gasket to speed installation — installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton
- Bell® conduit bodies are UPC-A bar coded for sales and inventory control

Compliances


- – Standard 514B
- – C22.2 #18

ORDERING INFORMATION - DIMENSIONS

TYPE T				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EAT-1CG	1/2"	12	E-PAK	
EAT-2CG	3/4"	15	E-PAK	
EAT-3CG	1"	5	E-PAK	
EAT-4CG	1-1/4"	5	E-PAK	
EAT-5CG	1-1/2"	5	E-PAK	
EAT-6CG	2"	2	E-PAK	

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	1-7/16"	4-29/32"	2-1/8"
3/4"	1-1/2"	4-5/8"	3/4"	1-11/16"	5-1/2"	2-11/32"
1"	1-3/4"	5-3/8"	1"	1-15/16"	6-7/16"	2-21/32"
1-1/4"	2-1/2"	6-5/8"	1-1/4"	2-7/8"	8-7/16"	3-19/32"
1-1/2"	2-1/2"	6-5/8"	1-1/2"	2-7/8"	8-7/16"	3-19/32"
2"	3-1/8"	8-1/2"	2"	3-7/16"	10-3/4"	4-1/32"

TYPE T

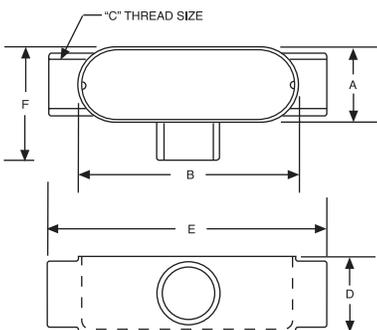


WEATHERPROOF BOXES,
COVERS AND LIGHTING



Applications

- For use on EMT conduit in dry locations
- Use conduit outlet bodies for conduit sections, for making bends in conduit runs, as pull outlets, or to provide openings for making splices and taps in conductors

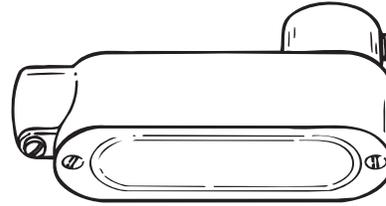

TYPE LB


Product Features

- Assembled with cover to speed installation — installer has all components needed
- Flat back design for easy mounting close to walls
- Cast of high strength, corrosion and weather resistant aluminum alloy with painted finish
- May be used on aluminum or steel conduit
- Lightweight, makes installation simple
- Unique E-PAK™ packaging serves as a shipping and display carton

Compliances

- – Standard 514B
- – C22.2 #18

TYPE LB

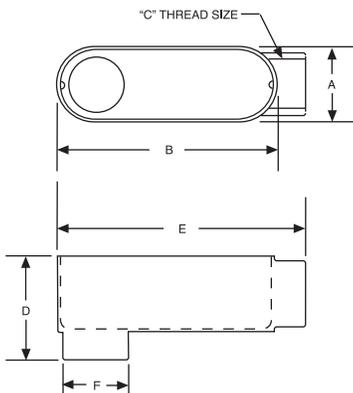

ORDERING INFORMATION - DIMENSIONS

TYPE LB				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EBLB-1CG	1/2"	12	E-PAK	
EBLB-2CG	3/4"	15	E-PAK	
EBLB-3CG	1"	5	E-PAK	

DIMENSIONS						
CONDUIT SIZE	A	B	C	D	E	F
1/2"	1-5/16"	3-7/8"	1/2"	2-1/8"	4-3/8"	1-1/16"
3/4"	1-1/2"	4-5/8"	3/4"	2-7/16"	5-1/8"	1-11/32"
1"	1-3/4"	5-3/8"	1"	2-13/16"	5-15/16"	1-21/32"

Application

- For use with conduit to act as an elbow between service entrance and vertical entrance head conduit runs




Product Features

- Lightweight aluminum construction eases installation and provides corrosion resistance
- Removable cover and gasket allows for easier wire pulling and access to the raceway
- Unique E-PAK™ packaging serves as a shipping and display carton

Compliances

- – Standard 514B
- – C22.2 #18


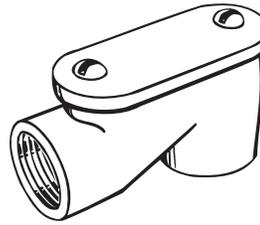


EASLB SERIES

ORDERING INFORMATION - DIMENSIONS

ENTRANCE ELLS				
CATALOG NUMBER	TRADE SIZE	STD. PKG.	PKG. TYPE	UPC BAR CODE
EASLB-1B	1/2"	12	E-PAK	
EASLB-2B	3/4"	15	E-PAK	
EASLB-3B	1"	5	E-PAK	
EASLB-4B	1-1/4"	5	E-PAK	
EASLB-5B	1-1/2"	5	E-PAK	
EASLB-6B	2"	2	E-PAK	

SERVICE ENTRANCE

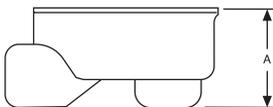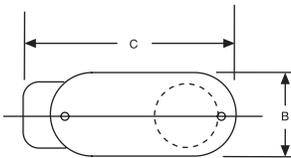

DIMENSIONS				
CATALOG NUMBER	TRADE SIZE	A	B	C
EASLB-1B	1/2"	1-5/8"	1-13/32"	3-9/32"
EASLB-2B	3/4"	1-16/64"	1-45/64"	3-13/16"
EASLB-3B	1"	2-1/8"	1-9/16"	4-5/16"
EASLB-4B	1-1/4"	2-9/16"	2-7/16"	5-9/16"
EASLB-5B	1-1/2"	2-19/32"	2-5/8"	6-1/4"
EASLB-6B	2"	3-1/8"	3-5/64"	6-3/4"

Replacement Globes Application


- For use with Bell® garden lights

Portable Adapter Kit Application


- Provides an easy mounting base for Bell® lampholders and garden lights

Portable Adapter Kit Product Features

- Rugged metallic construction
- State-of-the-art powder coat finish provides maximum weatherability and scratch-resistance

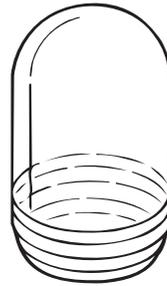


5694-0, 5695-0

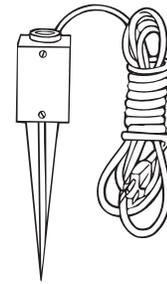


5600-0

ORDERING INFORMATION - DIMENSIONS

REPLACEMENT GLOBE

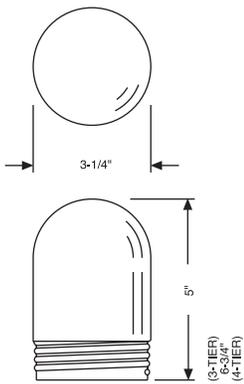

ADAPTER KIT

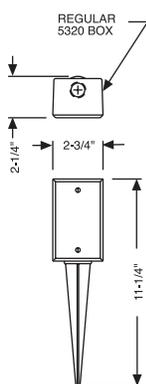

REPLACEMENT GLOBES FOR GARDEN LIGHTS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5694-0	Clear	For 3-tier	Carton	4	
5695-0	Clear	For 4-tier	Carton	4	

PORTABLE ADAPTER KIT					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5600-0	Gray	1/2" Hub	Boxed	1	

Rectangular box, blank cover, 8" spike and 6' cord with plug



Nite Switch Automatic Controls Application


- Nite switches are used for sunset activated automatic control of night lighting — Nite switches may be used to control porch lights, garden lights, post lanterns, barn lights, loading dock lights, outdoor signs and the like

Nite Switch Automatic Controls Product Features

- Durable weatherproof construction
- Built-in time delay prevents operation triggered by auto headlamps or other temporary light flashes

Nite Switch Automatic Controls Compliances


- Standard 773A
-

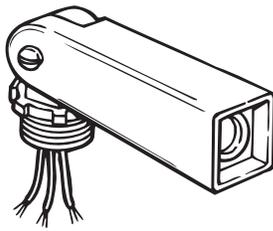

5638-5



5628-0



5618-0


ORDERING INFORMATION - DIMENSIONS

NITE SWITCH AUTOMATIC CONTROLS - 300 WATTS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5638-5	Gray	Swivel switch, locknut	Carded	6	

MOUNTING SPIKE 8" LONG - DIE CAST ZINC					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5628-0	Gray	1/2" NPT	Shrink	10	


POLE TOP FITTING - ALUMINUM FITS 1-1/2" OR 2" PIPE					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5618-0	Gray	Removable 1/2" nipple	Shrink	10	

NITE SWITCH AUTOMATIC CONTROL CATALOG NO. 5638-5

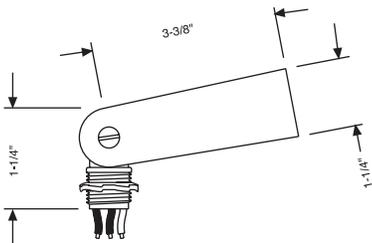

MOUNTING SPIKE CATALOG NO. 5628-0

POLE TOP FITTING CATALOG NO. 5618-0

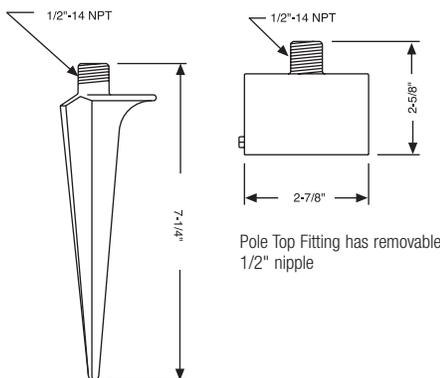

WEATHERPROOF BOXES, COVERS AND LIGHTING



Nonmetallic 4" Square Burial Box Assembly Application

- For use in underground wiring installations such as accent and landscape lighting conduit risers

Nonmetallic 4" Square Burial Box Assembly Product Features

- Durable non-metallic construction — will not rust or corrode
- Over-sized box provides both ample wiring space and a solid foundation for conduit risers

Nonmetallic 4" Square Burial Box Assembly Compliance





Closure Plugs Application

- For use with Bell® weatherproof boxes, extension adapters, cluster covers and round splice boxes to seal off unused outlets


Closure Plugs Product Feature

- Rugged die cast zinc construction

BURIAL BOX ASSEMBLY
CATALOG NO. 5304-0

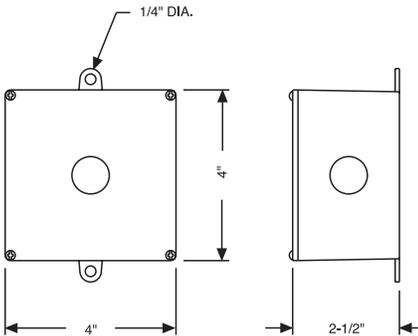

5304-0



5269-0 to 5269-9
5270-0 to 5270-9
5271-0

ORDERING INFORMATION - DIMENSIONS

NONMETALLIC 4" SQUARE BURIAL BOX ASSEMBLY* 2 1/4" DEEP					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5304-0*	Gray	3-1/2" Outlets	Shrink	5	

*Includes cover with 1/2" outlet

*Cover gasket & screws; also (2) 1/2" nylon UF connectors, (2) 1/2" sealing locknuts & (1) 1/2" threaded hub

CLOSURE PLUGS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5269-0	Gray	1/2" NPT	75 Polybags of 4	75 bags*	
5269-1	White	1/2" NPT	75 Polybags of 4	75 bags*	
5269-2	Bronze	1/2" NPT	75 Polybags of 4	75 bags*	
5269-5	Gray	1/2" NPT	12 Cards of 3	12 cards**	
5269-6	White	1/2" NPT	12 Cards of 3	12 cards**	
5269-7	Bronze	1/2" NPT	12 Cards of 3	12 cards**	
5269-9	Gray	1/2" NPT	Bulk	1000	—
5270-0	Gray	3/4" NPT	75 Polybags of 4	75 bags*	
5270-5	Gray	3/4" NPT	12 Cards of 3	12 cards**	
5270-9	Gray	3/4" NPT	Bulk	1000	—
5271-0	Gray	1" NPT	75 Polybags of 4	75 bags*	

*Order in standard package bag quantities only – not per piece

**Order in standard package card quantities only – not per piece



Round Closure Plates Application


- Use in dry locations for closure of unused ceiling outlets

Round Closure Plates Product Features


- Rugged metallic construction
- State-of-the-art powder coat paint finish provides a scratch-resistant surface

Round Closure Plates and Phone/TV Outlets Compliance


- - UL Listed



5652-1




5653-1




5654-1



5303-0



5655-0




5656-0


ORDERING INFORMATION - DIMENSIONS

ROUND CLOSURE PLATES
CATALOG NO. 5652-1


CATALOG NO. 5653-1

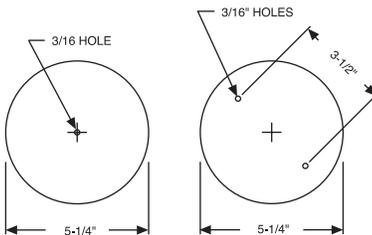

CATALOG NO. 5654-1



BOX MOUNTING LUG

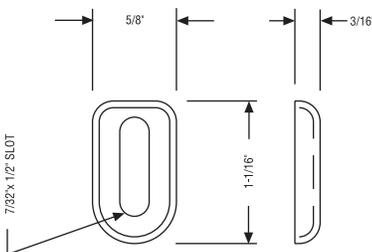


5" ROUND CLOSURE PLATES - STEEL					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5652-1	Off White	Screw & universal mount strap	Shrink	10	
5653-1	Off White	(2) 8 - 32 screws, direct mount to fixture outlet box	Shrink	10	
5654-1	Off White	Fixture stud & universal mount strap	Shrink	10	

BOX MOUNTING LUGS & SCREWS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5303-0	—	—	100 Polybags of 2	100	

PHONE/TV OUTLETS FIT GFCI COVERS - INCLUDES JACKS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5655-0	Gray	(1) Phone & (1) TV outlet	Shrink	10	
5656-0*	Gray	(2) Phone outlets	Shrink	10	

*CSA Certified

PHONE/TV OUTLET

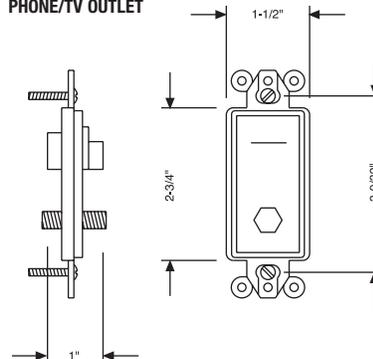

WEATHERPROOF BOXES,
COVERS AND LIGHTING




Application


- Replacement gaskets for Bell® weatherproof boxes

Product Features

- Each gasket has cut outs for a toggle switch, duplex receptacle and 1.406" dia. round receptacle
- Remove the cut outs for the duplex and round receptacles for a GFCI receptacle opening




5020-0, 5016-0




5019-0

ORDERING INFORMATION - DIMENSIONS

CATALOG NO. 5019-0



CATALOG NO. 5020-0



RECTANGULAR BOX/COVER GASKETS					
CATALOG NUMBER	COLOR	DESCRIPTION	PKG. TYPE	STD. PKG.	UPC BAR CODE
5019-0	Black	1-Gang	20 Cello bags of 2	20	
5020-0	Black	2-Gang	20 Cello bags of 2	20	



ORDERING INFORMATION

Applications

- For use wherever a high-performance flashlight is needed
- HubbelLITE™ flashlights – the last flashlight you'll ever need

Product Features

- Xenon lamps – 400% brighter than ordinary incandescent, 200% brighter than krypton. Xenon lamps last 2-4 times longer than incandescent
- Non-conductive bodies – ABS bodes and polycarbonate lenses are non-conductive, that means they're safer than metal flashlights when working around electrical supplies
- Watertight design – Special "O" rings provide for reliable, all-weather action (Cat# 2001-3A, 2002-3A and 3003-C)
- Industrial grade – virtually indestructible body and lens

HUBBELITE™ FLASHLIGHTS						
CATALOG NUMBER	DESCRIPTION	SPECS	COMPONENTS	SAFETY APPROVALS	STD. PKG.	UPC BAR CODE
2001-3A	HubbelLITE™ Lightbender for tight spots w/kit, kit incl. spare lamp, lite bender, red "night light" & replacement "O" ring	Power Source: 2AAA cells incl., Bulb/lamp: xenon Z2M bulb module, Bulb/lamp life: 15 hrs Weight: (w/o batteries) .7 oz. (.02 kg) Submersible: Yes, 500 ft.	Lens: polycarbonate, Reflector: polycarbonate, Tube: ABS (yellow), Contact Strips: spring brass	UL: Class I, Div. 1, Group C,D. Class I, Div. 2, Group A,B,C, D. Class II, Div. 2, Group G. Operating Temp. Code T3C. CSA: Class I, Div. 2, Group A,B,C,D. Class II, Div. 2, Group G. Operating Temp. Code T4. MSHA: Approved for use as mining equipment 10C-645-0	12	■■■■■
	2002-3A	HubbelLITE™ Lightbender for tight spots				
2021-3A	HubbelLITE™ Compact flashlight	Power Source: 1AAA cells incl., Bulb/lamp: xenon Z1M bulb module, Bulb/lamp Life: 15 hrs. Weight: (w/o batteries) .5 oz. (.014 kg) Submersible: Yes, 500 ft.	Lens Ring: super tough nylon, Lens: polycarbonate, Reflector: Ultem 100, Tube: super tough nylon (yellow), Contact Strip: brass Lanyard: braided nylon (black), Belt Clip: super-tough nylon (yellow)	Group A,B,C,D. Class II, Div. 2, Group G. Operating Temp Code T5	12	■■■■■
2202-2A	HubbelLITE™ (w/o batteries) Hands-free operation	Power Source: 2AA cells incl., Bulb/lamp: xenon 22M Bulb/lamp Life: 15 hours, Weight 1.6 oz. (.05 kg) Submersible: No				
3003-C	HubbelLITE™ Single-hand operation flashlight	Power Source: 3 C cells not incl., Bulb/lamp: XPR3, Bulb/lamp Life: 30 hrs, Weight: (w/o batteries) 6.34 oz. (.18 kg) Submersible: Yes, 100 ft.		UL: Class I, Div. 1, Group D. Operating Temp. Code T3A. UL and CSA: Class I, Div. 2, Group A,B,C,D. Class II, Div. 2, Group G. Operating Temp. Code T3. MSHA: Approved for use as mining equipment 10C-647-0	12	■■■■■
LM-1	Replacement lamp for 2001-3A, 2002-3A,2202-2A					
LM-2	Replacement lamp for 3003-C				12	■■■■■
LM-3	Replacement lamp for 2021-3A				12	■■■■■

WEATHERPROOF BOXES, COVERS AND LIGHTING

